

WAAS CH 72800 W17B	APP CRS 172°	Rwy Idg TDZE 6177 Apt Elev 6187
--	------------------------	---

RNAV (GPS) Y RWY 17R

CITY OF COLORADO SPRINGS MUNI (COS)

RNP APCH - GPS.


▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C.
Simultaneous approach authorized with ILS or LOC RWY 17L and ILS RWY 17L (SA CAT I).
LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

MISSED APPROACH: Climb to 7000 then climbing left turn to 9000 direct DRAKE and hold.

ATIS 125.0 254.3	SPRINGS APP CON 124.0 257.875	SPRINGS TOWER 119.9 360.6	GND CON 121.7 348.6	CLNC DEL 134.45 363.125
----------------------------	---	-------------------------------------	-------------------------------	-----------------------------------

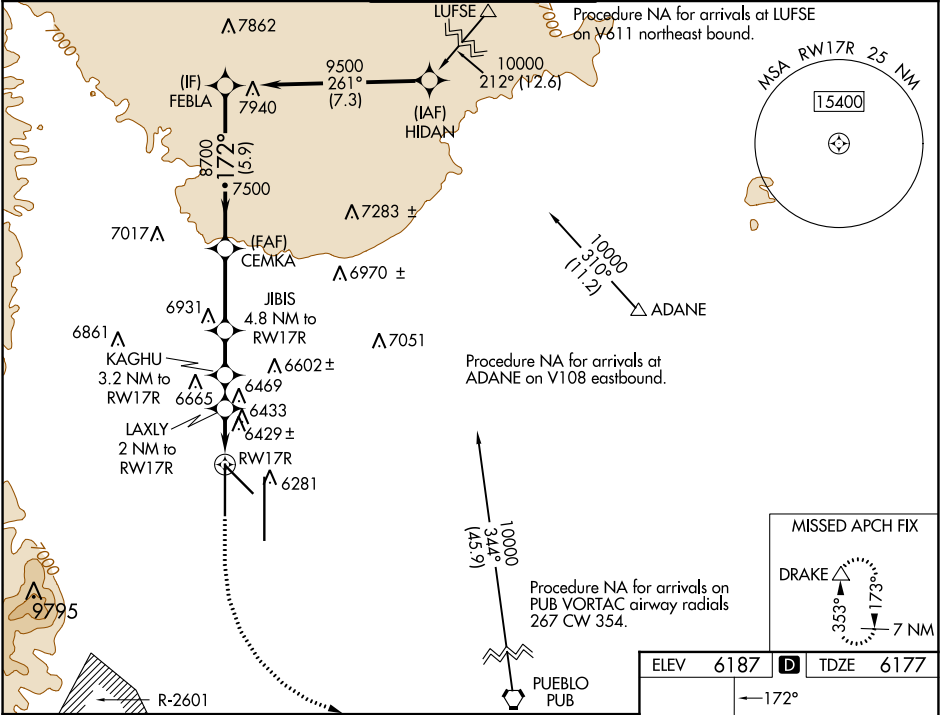

7000 9000 DRAKE		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 49).	
LAXLY 2 NM to RW17R		JIBIS 4.8 NM to RW17R	
KAGHU 3.2 NM to RW17R		CEMKA 8700	
LAXLY 2 NM to RW17R		FEBLA 9500	
RW17R 1.4 NM to RW17R		7760	
RW17R 1.4 NM		8700	
RW17R 0.6 NM		GP 3.00° TCH 55	
RW17R 1.2 NM			
RW17R 1.6 NM			
RW17R 3 NM			
RW17R 5.9 NM			
CATEGORY	A	B	C
LPV DA	6377/40 200 (200-¾)		
LNAV/VNAV DA	6752-2 575 (600-2)		
LNAV MDA	6680/55 503 (500-1)	6680-1¾ 503 (500-1¾)	
CIRCLING	6740-1 553 (600-1)	6800-1 613 (700-1)	7040-2½ 853 (900-2½)

