


APCH CRS	Rwy Idg	8001
312°	TDZE	17
	Arprt Elev	18

[USN]


RNAV (GPS) RWY 31L
CORPUS CHRISTI NAS (TRUAX FLD) (KNGP)

RNP APCH			MISSED APPROACH: Climb to 600, then climbing right turn to 2000 direct UBOAT and hold.		
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (129°F).					
ATIS ★ 127.9 290.9	APP CON 128.675 343.75	NAVY CORPUS TOWER ★ 134.85 0 340.2	GND CON 118.7 257.85	CLNC DEL 314.3	ASR/ PAR

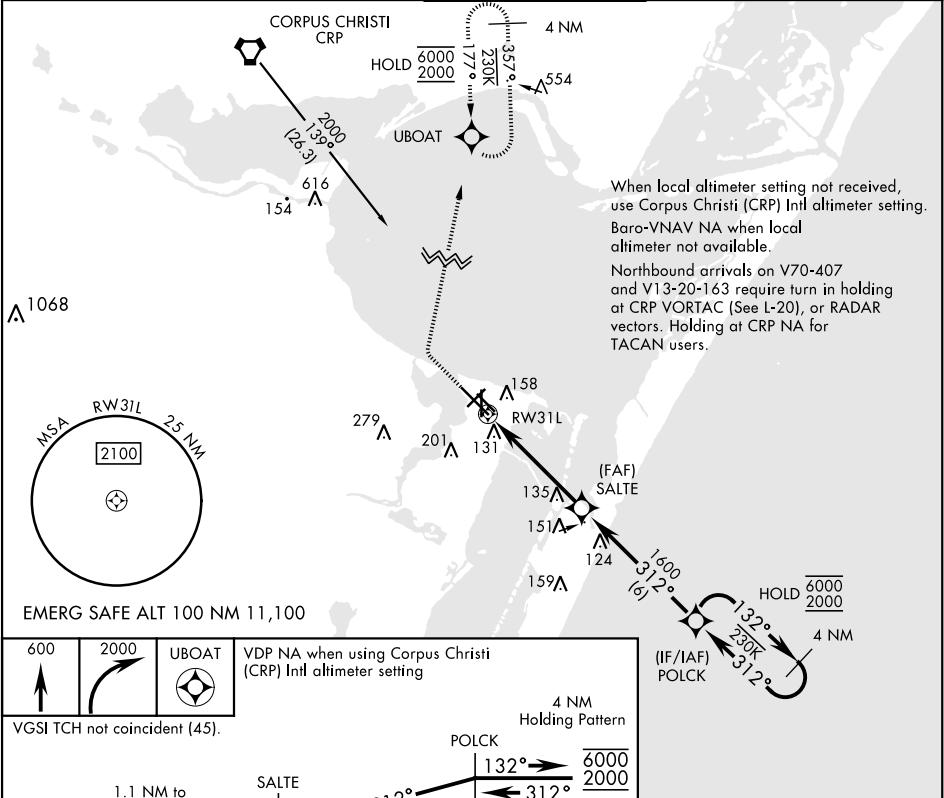


When local altimeter setting not received, use Corpus Christi (CRP) Intl altimeter setting. Baro-VNAV NA when local altimeter not available. Northbound arrivals on V70-407 and V13-20-163 require turn in holding at CRP VORTAC (See L-20), or RADAR vectors. Holding at CRP NA for TACAN users.

600	2000	UBOAT	VDP NA when using Corpus Christi (CRP) Intl altimeter setting
-----	------	-------	---

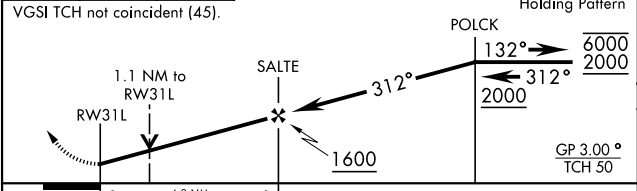

CATEGORY	A	B	C	D
LNAV/VNAV DA	412-1½	395	(400-1½)	
LNAV MDA	420-1	403 (500-1)	420-1½	403 (500-1½)
CIRCLING	460-1 442 (500-1)	480-1 462 (500-1)	520-1½ 502 (600-1½)	580-2 562 (600-2)
CORPUS CHRISTI (CRP) INTL ALTIMETER SETTING				
LNAV MDA	460-1	443 (500-1)	460-1½	443 (500-1½)
CIRCLING	500-1	482 (500-1)	540-1½ 522 (600-1½)	620-2 602 (700-2)

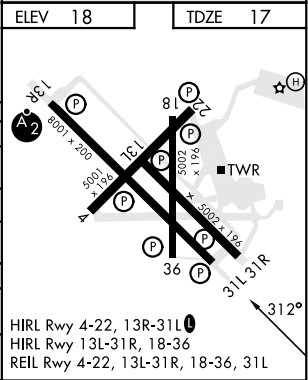

SC-3, 18 APR 2024 to 16 MAY 2024

SC-3, 18 APR 2024 to 16 MAY 2024