

RNAV (GPS) RWY 31R

CORPUS CHRISTI NAS (TRUAX FLD) (KNGP)

[USN]

APCH CRS	Rwy Idg	5002
312°	TDZE	18
	Arpt Elev	18

RNP APCH

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (129°F).

MISSED APPROACH: Climb to 600, then climbing right turn to 2000 direct UBOAT and hold.

ATIS ★
127.9 290.9

APP CON
128.675 343.75

NAVY CORPUS TOWER ★
134.85 340.2

GND CON
118.7 257.8


CLNC DE
314.3

ASR/
PAR


Diagram illustrating the VORTAC holding pattern for CRP NA. The pattern is a racetrack holding pattern centered on the UBOAT VORTAC. The inbound leg is 2.00 minutes, and the outbound leg is 2.39 minutes. The holding altitude is 6000 feet. The pattern is defined by the 154° and 339° headings. The diagram also shows the 230K and 357° headings for the outbound leg, and the 554° heading for the inbound leg. The diagram is labeled "CORPUS CHRISTI CRP" and "UBOAT".

When local altimeter setting not received,
use Corpus Christi (CRP) Intl altimeter setting.


Baro-VNAV NA when local altimeter not available.

 Λ_{1068} 

EMERG SAFE ALT 100 NM 11,100




VGS| TCH not coincident (45).

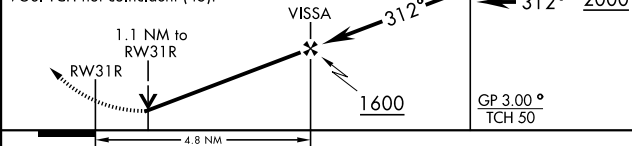

CATEGORY	A	B	C	D
RNAV/VNAV DA	411-1½	393	(400-1½)	
RNAV MDA	420-1	402 (500-1)	420-1½	402 (500-1½)
C CIRCLING	460-1 442 (500-1)	480-1 462 (500-1)	520-1½ 502 (600-1½)	580-2 562 (600-2)
CORPUS CHRISTI (CRP) INTL ALTIMETER SETTING				
RNAV MDA	460-1	442 (500-1)	460-1½	442 (500-1½)
C CIRCLING	500-1	482 (500-1)	540-1½ 522 (600-1½)	620-2 602 (700-2)

ELEV	18		TDZE	18
------	----	--	------	----



HIRL Rwy 4-22, 13R-31L
HIRL Rwy 13L-31R, 18-36
REIL Rwy 4-22, 13L-31R, 18-36, 31L

CORPUS CHRISTI, TEXAS

27°42'N-97°17'W

CORPUS CHRISTI NAS (TRUAX FLD) (KNGP)

Amdt 2 25JAN24

RNAV (GPS) RWY 31R

SC-3, 18 APR 2024 to 16 MAY 2024