


RNAV (GPS) RWY 4

APCH CRS	Rwy Idg	5001
042°	TDZE	17
	Arpt Elev	18


[USN]

CORPUS CHRISTI NAS (TRUAX FLD) (KNGP)

RNP APCH			MISSED APPROACH: Climb to 2000 direct FOLEM and hold.		
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (129°F)					
ATIS ★ 127.9 290.9	APP CON 128.675 343.75	NAVY CORPUS TOWER ★ 134.85 340.2	GND CON 118.7 257.85	CLNC DEL 314.3	ASR/ PAR

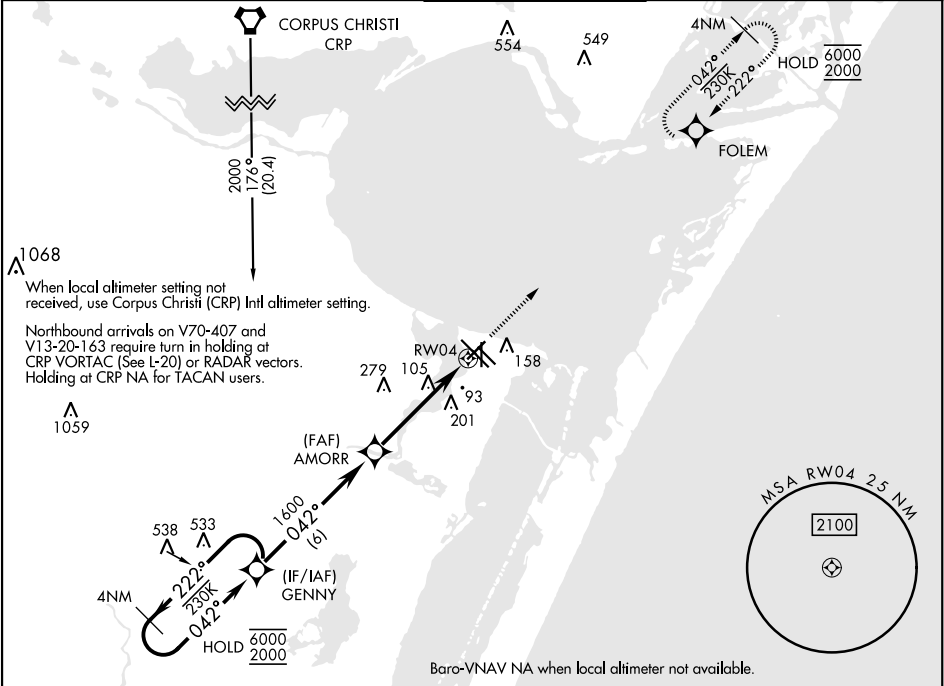

EMERG SAFE ALT 100 NM 11,100			
ELEV	18	TDZE	17

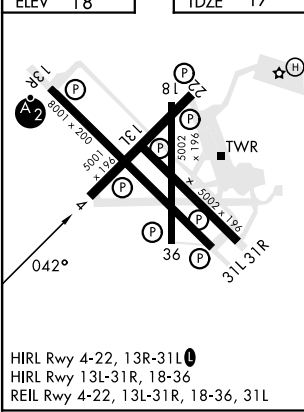

4 NM Holding Pattern	GENNY	VDP NA when using Corpus Christi (CRP) Infil altimeter setting.	2000	FOLEM
2000	042°	042°	1600	1 NM to RW04
GP 3.00°	TCH 50	4.8 NM		
CATEGORY	A	B	C	D
LNAV/VNAV DA	267-¾	250	300-¾	
LNAV MDA	400-1	383 (400-1)	400-1½	383 (400-1½)
CIRCLING	460-1	480-1	520-1½	580-2
	442 (500-1)	462 (500-1)	502 (600-1½)	562 (600-2)
CORPUS CHRISTI (CRP) Infil ALTIMETER SETTING				
LNAV MDA	420-1	403 (500-1)	420-1½	403 (500-1½)
CIRCLING	500-1	482 (500-1)	540-1½	620-2
			522 (600-1½)	602 (700-2)

RNAV (GPS) RWY 4

SC-3, 18 APR 2024 to 16 MAY 2024

SC-3, 18 APR 2024 to 16 MAY 2024