


WAAS CH 86518 W16B	APP CRS 164°	Rwy Idg 8009 TDZE 364 Apt Elev 374
--	------------------------	---

RNAV (GPS) Y RWY 16R

MAHLON SWEET FLD (EUG)

RNP APCH.			 ALSIF-2	MISSED APPROACH: Climb to 5000 direct TIPE and on track 229° to VAUGN and hold, continue climb-in-hold to 5000.		
 Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -10°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cais visibility to RVR 4500, increase LNAV Cat C/D visibility to RVR 5500.						
ATIS 125.225	CASCADE APP CON★ 119.6 348.7	EUGENE TOWER★ 118.9 (CTAF) 371.9 (Rwy 16R/34L) 124.15 371.9 (Rwy 16L/34R)		GND CON 121.7 269.5	CLNC DEL 121.7 269.5	UNICOM 122.95

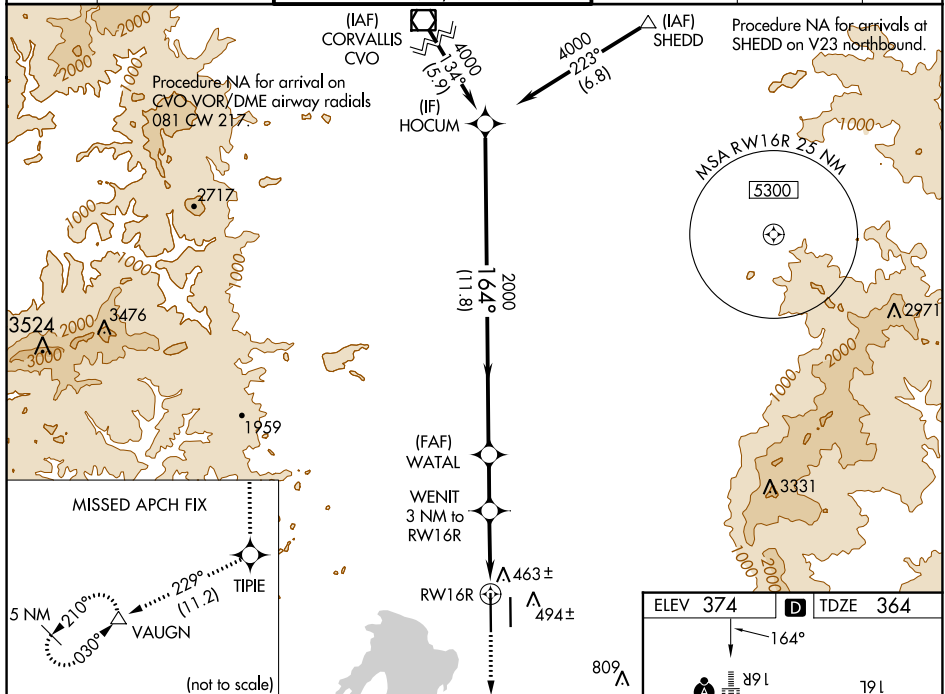

CATEGORY	A	B	C	D
LPV DA		564/18	200 (200-½)	
RNAV/VNAV DA		628/24	264 (300-½)	
RNAV MDA	720/24	356 (400-½)	720/30	356 (400-¾)
C CIRCLING	820-1 446 (500-1)	840-1 466 (500-1)	1000-1¾ 626 (700-1¾)	1140-2½ 766 (800-2½)

