

APP CRS	Rwy Idg	9800
356°	TDZE	1276
	Apt Elev	1296

RNAV (RNP) Z RWY 35L

WILL ROGERS WORLD (OKC)

ASR


For uncompensated Baro-VNAV systems, procedure NA below -12°C (11°F) or above 54°C (130°F). GPS required. Simultaneous approach authorized with Rwy 35R. Use of FD or AP providing RNAV track guidance required during simultaneous operations. For inop ALS, increase RNP 0.30 all Cats visibility to 1¼ SM.

MALSR

MISSED APPROACH:

Climb to 2000 then climbing left turn to 3000 direct JESKE and hold.

D-ATIS	OKE CITY APP CON	ROGERS TOWER	GND CON	CLNC DEL
125.85	124.6 266.8	119.35 269.45	121.9 348.6	124.35

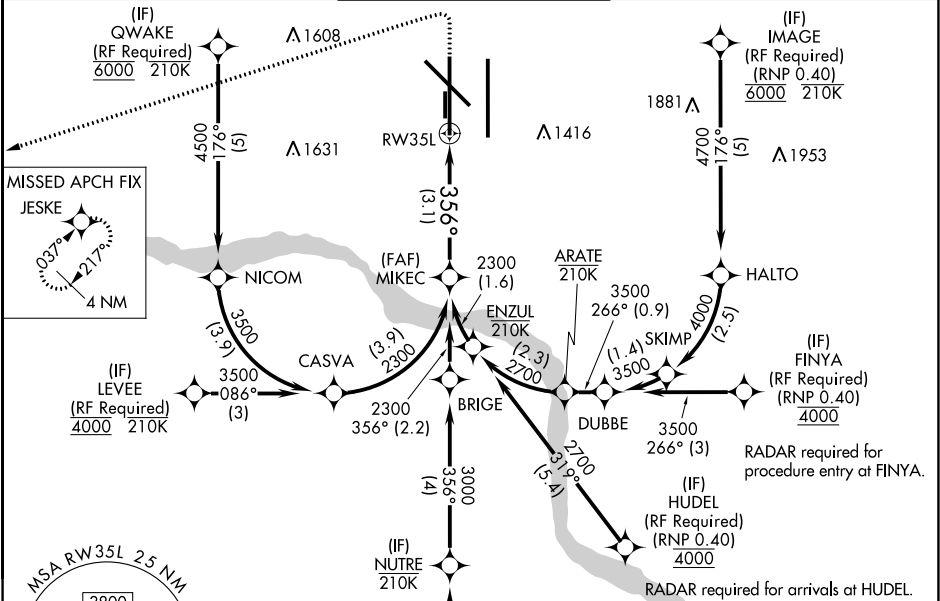

ELEV 1296

TDZE 1276

REIL Rwy 13 and 31

TDZ/CL Rwy 35R

MIRL Rwy 13-31

HIRL Rwy 17L-35R and 17R-35L

MIKEC

2300

See planview for multiple IF locations.

2000

3000

JESKE

2300

356°

RW35L

GP 3.00°

TCH 49

3.1 NM

CATEGORY	A	B	C	D
RNP 0.30 DA		1646/38	370 (400-¾)	

AUTHORIZATION REQUIRED

