


ATIS
132.375
CLNC DEL
119.7
GND CON
121.9 257.8
ROANOKE TOWER
118.3 257.8
ROANOKE DEP CON
126.9 339.8

NOTE: RADAR required.

TAKEOFF MINIMUMS:
Rwys 6, 34: NA - Obstacles
Rwy 16: Standard with minimum climb of 260' per NM to 2300
Rwy 24: Standard with minimum climb of 205' per NM to 2800

TOP ALTITUDE:
5000

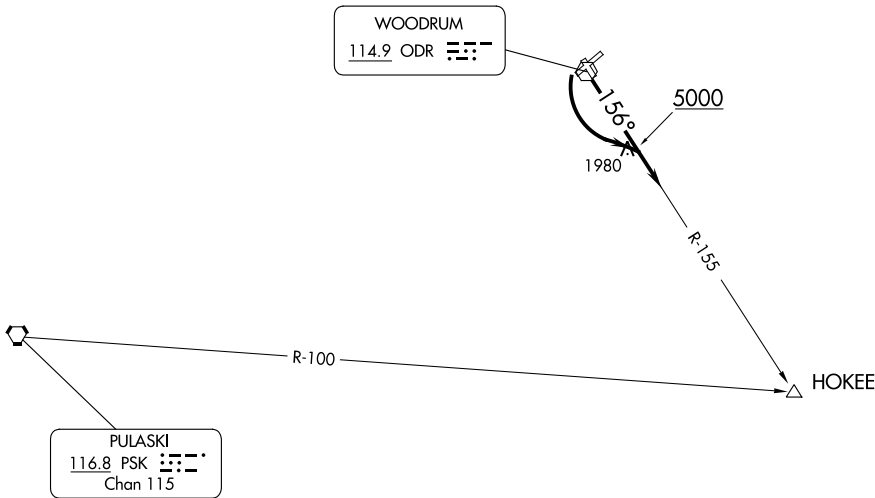

NOTE: Chart not to scale.



DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 16: Climb to 5000 on heading 156° to intercept ODR R-155 to HOKEE INT. Expect RADAR vectors to filed/assigned route.

TAKEOFF RUNWAY 24: Climbing left turn to 5000 to intercept ODR R-155 to HOKEE INT. Expect RADAR vectors to filed/assigned route.