

LOC/DME I-SZK	APP CRS	Rwy Idg	6800
111.1	072°	TDZE	1175
Chan 48		Apt Elev	1175

LDA Z RWY 6

ROANOKE/BLACKSBURG RGNL (WOODRUM FLD) (R.O.A)

▼


For inop MALSR, increase S-LDA/GS 6 all Cats visibility to ¾ mile. Missed approach requires a minimum climb of 350 feet per NM to 3600, if unable to meet climb gradient, see LDA Y Rwy 6.

☁13°C

MALSR

MISSED APPROACH: Climb to 1800 then climbing right turn to 5000 on ODR VOR R-155 to PARTE INT/LYH 28.6 DME and hold, continue climb-in-hold to 5000.

ATIS	ROANOKE APP CON	ROANOKE TOWER	GND CON	CLNC DEL
132.375	126.9 339.8	118.3 257.8	121.9 257.8	119.7

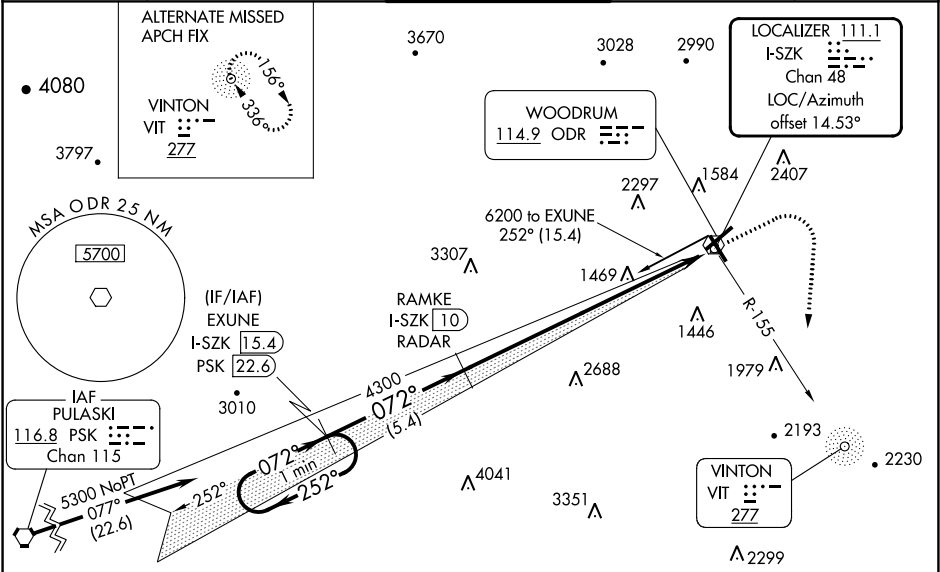

Procedure NA for arrivals on PSK
VORTAC airway radials 021 CW 100.

