

WAAS CH 49216 W27A	APP CRS 270°	Rwy Idg 10000 TDZE 6765 Apt Elev 6765
--	------------------------	--

RNAV (GPS) RWY 27
SOUTHWEST WYOMING RGNL (RKS)

RNP APCH.

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -27°C or above 44°C. For inop ALS increase LNAV/VNAV all Cats visibility to $\frac{7}{8}$ SM.


MALSR




MISSED APPROACH: Climb to 9800 direct REGVE and hold.

ASOS 118.375	SALT LAKE CENTER 124.35 353.5	UNICOM 122.8 (CTAF) 0
------------------------	---	---------------------------------


MISSED APCH FIX



Procedure NA for arrivals at OCS VOR/DME on V235 southwest bound, V187 north and southbound and T298 southwest bound.

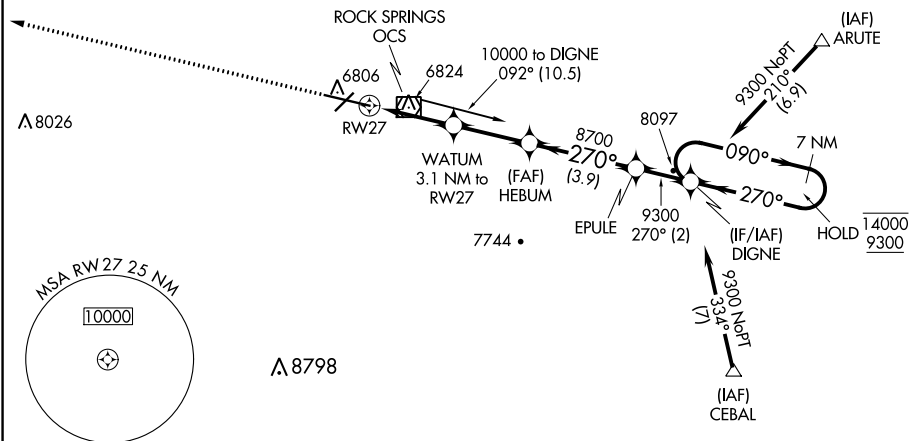

ELEV 6765	D	TDZE 6765
-----------	----------	-----------



MIRL Rwy 3-21
HIRL Rwy 9-27 **L**
REIL Rwy 3 and 21 **L**

9800		REGVE						
CATEGORY		A		B		C		D
LPV DA				6965- $\frac{1}{2}$		200 (200- $\frac{1}{2}$)		
LNAV/VNAV DA				7036- $\frac{1}{2}$		271 (300- $\frac{1}{2}$)		
LNAV MDA				7100- $\frac{1}{2}$		335 (400- $\frac{1}{2}$)		
C CIRCLING		7140-1 375 (400-1)		7220-1 455 (500-1)		7220-1 $\frac{1}{2}$ 455 (500-1 $\frac{1}{2}$)		7540-2 $\frac{1}{2}$ 775 (800-2 $\frac{1}{2}$)