


WAAS	APP CRS	Rwy Idg	8412
CH 50108	274°	TDZE	774
W27A		Apt Elev	798


RNAV (GPS) RWY 27L

SOUTH BEND INTL (SBN)

RNP APCH - GPS		MALSR	MISSED APPROACH: Climb to 2600 direct TOKOC and hold.	
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. For inop ALS, increase LNAV Cat C/D visibility to 1½ SM. Circling Rwy 27R NA at night.				
ATIS	SOUTH BEND APP CON ★	SOUTH BEND TOWER ★	GND CON	CLNC DEL
120.675	118.55 257.8	135.675 (CTAF) 0 257.8	121.7	121.9

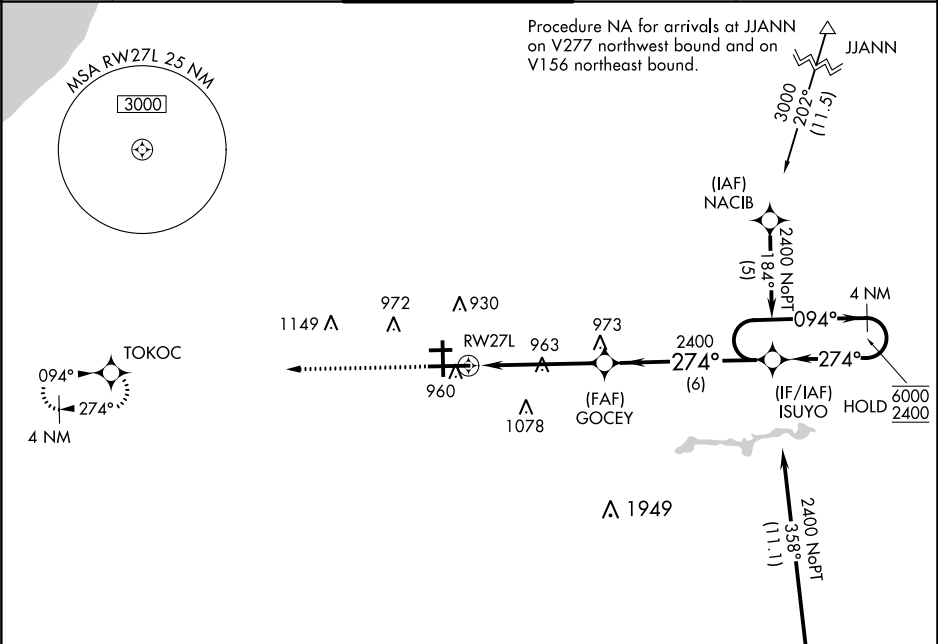

ELEV 798	D	TDZE 774
----------	---	----------

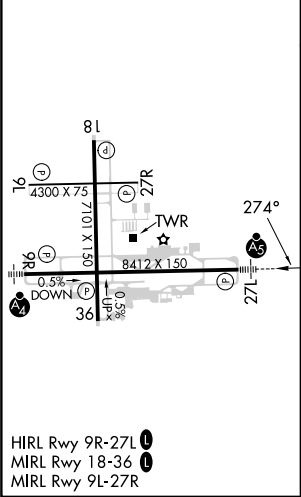

Procedure NA for arrival on GSH VORTAC airway radials 270 CW 060.				
CATEGORY	A	B	C	D
LPV DA	1030/24		256 (300-½)	
LNAV/VNAV DA	1160/40		386 (400-¾)	
LNAV MDA	1260/24	486 (500-½)	1260/50	486 (500-1)
CIRCLING	1280-1	482 (500-1)	1440-1¾ 642 (700-1¾)	1500-2¼ 702 (800-2¼)