


WAAS CH 65934 W03A	APP CRS 035°	Rwy Idg TDZE Apt Elev 7001 1078 1078
--	------------------------	--

RNAV (GPS) RWY 3
TOPEKA RGNL (F0E)


RNP APCH - GPS.

Baro-VNAV NA when using Philip Billard Muni altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. When local altimeter setting not received, use Philip Billard Muni altimeter setting and increase all DA 45 feet and all MDA 60 feet, increase LPV all Cats and LNAV/VNAV all Cats visibility ¼ mile, LNAV Cat C/D and Circling Cat D - visibilities ¼ mile.	MISSED APPROACH: Climb to 3000 direct VAJEG and hold.
---	--

ATIS 128.25	KANSAS CITY CENTER 123.8 343.7	FORBES TOWER★ 120.8 (CTAF) 340.2	GND CON 118.425 275.8	UNICOM 122.95
-----------------------	--	--	---------------------------------	-------------------------

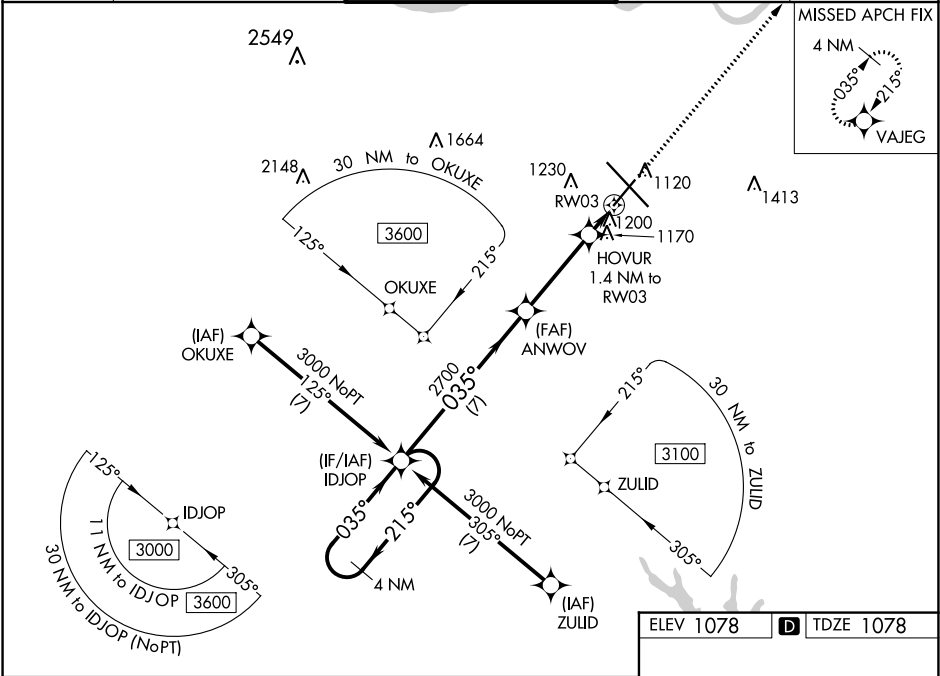

4 NM Holding Pattern		IDJOP	ANWOV	3000	VAJEG
3000		215°	035°	2700	035°
GP 3.00°					
TCH 47					
7 NM		3.6 NM	1.4 NM		
HOVUR 1.4 NM to RW03					
RW03					
*1560					
*LNAV only.					
CATEGORY	A	B	C	D	
LPV DA		1328-¾	250 (300-¾)		
LNAV/VNAV DA		1363-⅞	285 (300-⅞)		
LNAV MDA	1460-1	382 (400-1)	1460-1½	382 (400-1½)	
CIRCLING	1520-1 442 (500-1)	1580-1 502 (600-1)	1580-1½ 502 (600-1½)	1700-2 622 (700-2)	

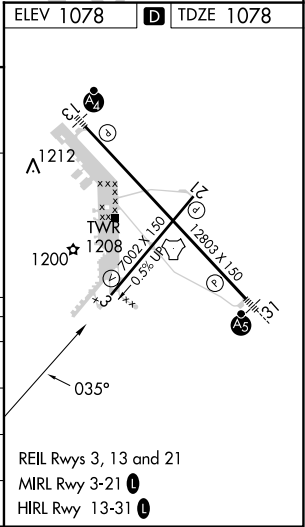

NC-2, 18 APR 2024 to 16 MAY 2024

NC-2, 18 APR 2024 to 16 MAY 2024