



LOC I-ILM 110.3	APP CRS 349°	Rwy Idg 72043 TDZE 31 Apt Elev 32
---------------------------	------------------------	--


ILS Y or LOC RWY 35

WILMINGTON INTL (ILM)

ADF required. RADAR required for procedure entry.		MALSR 	MISSED APPROACH: Climb to 600 then dimbing left turn to 1800 direct AIRL LOM and hold.
 For inop ALS, increase S-LOC 35 Cat C/D visibility to 1½ SM.			

ATIS 124.975	WILMINGTON APP CON ★ 118.25 284.65 (164°-343°) 135.75 317.425 (344°-163°)	WILMINGTON TOWER ★ 119.9 (CTAF) 0 239.3	GND CON 121.9 348.6	UNICOM 122.95
------------------------	---	--	-------------------------------	-------------------------

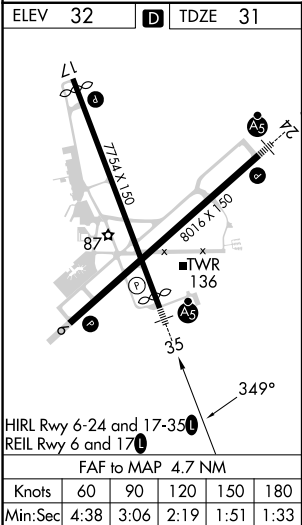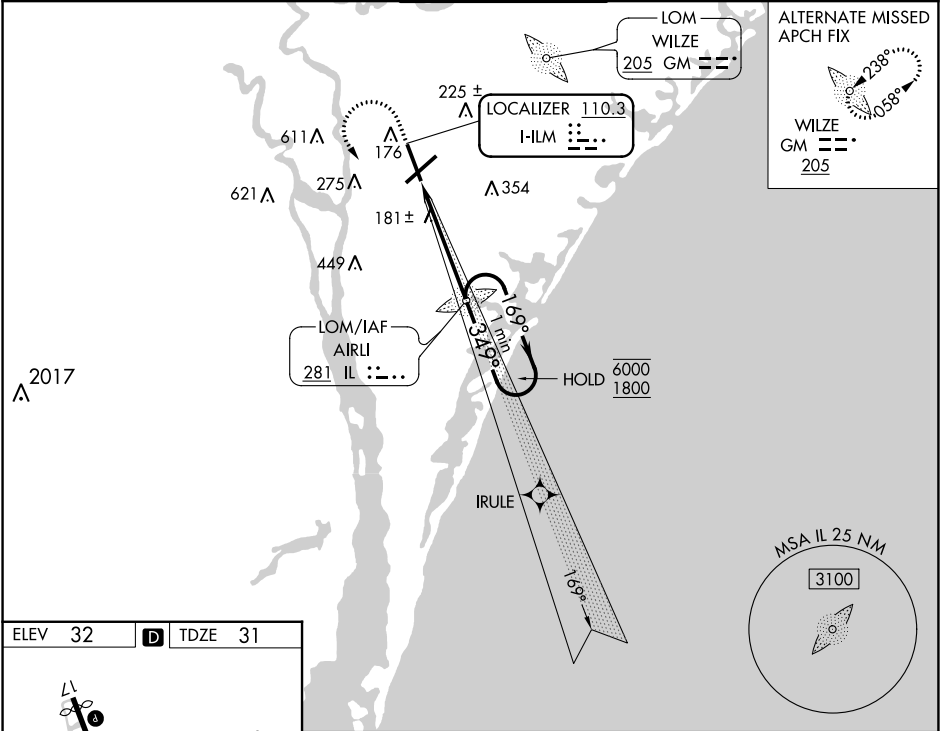

600 ↑ 1800 ↷ IL 		IL LOM 1576  One Minute Holding Pattern 169° → 6000 ← 349° 1800 1700 GS 3.00° TCH 37		
				
4.7 NM				
CATEGORY	A	B	C	D
S-ILS 35	242/24 211 (300-½)			
S-LOC 35	500/24 469 (500-½)		500/50 469 (500-1)	
☒ CIRCLING	560-1 528 (600-1)		720-2 688 (700-2)	920-3 888 (900-3)