


LOC I-JLN 110.3	APP CRS 134°	Rwy Idg 5813 TDZE 970 Apt Elev 978
---------------------------	------------------------	---

ILS or LOC RWY 13
JOPLIN RGNL (JLN)

ADF required for LOC only. RADAR required.		MALSF	MISSED APPROACH: Climb to 3100 on I-JLN LOC localizer course southeast to HOVIL/RADAR and hold.
Autopilot coupled approach NA below 1147'. Inop table does not apply to S-ILS 13 all Cats. MALSF (NSTD) 1368'.			

ATIS 120.85	KANSAS CITY CENTER 128.6 282.325	JOPLIN TOWER* 119.8 (CTAF) 0	GND CON 121.6	UNICOM 122.95
-----------------------	--	--	-------------------------	-------------------------

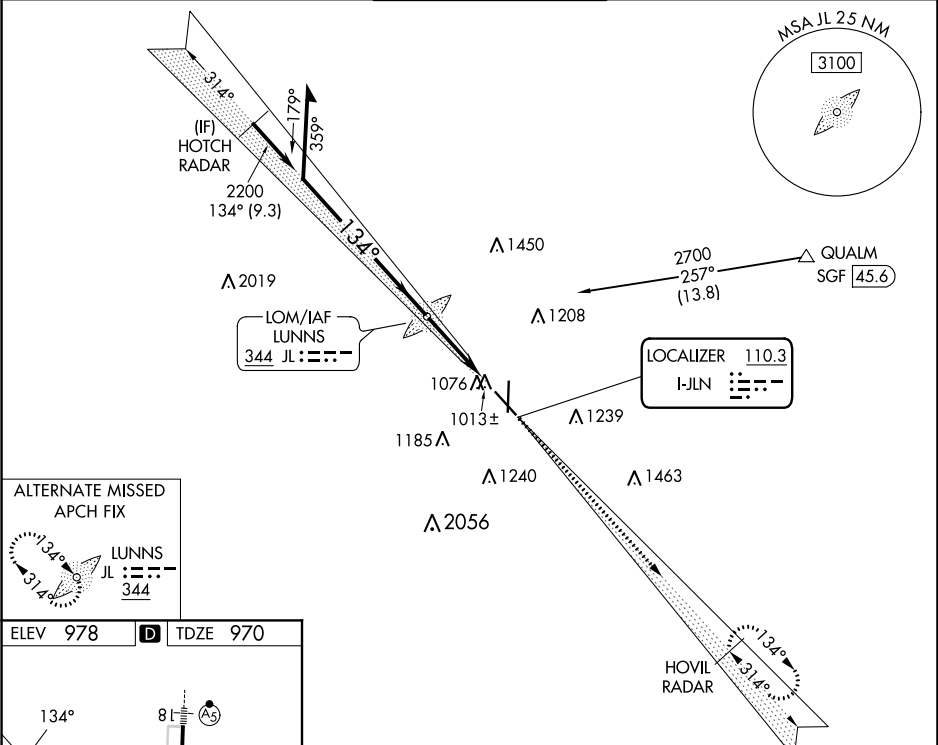

ELEV 978	D	TDZE 970
HIRL Rwy 13-31		
HIRL Rwy 18-36		
FAF to MAP 3.7 NM		
Knots	60	90 120 150 180
Min:Sec	3:42	2:28 1:51 1:29 1:14

Remain within 10 NM		JL LOM LUNNS	6000	3100	HOVIL RADAR
2700		314°	2178	I-JLN SE crs	
GS 3.00°		134°	2200		
TCH 40					
			3.7 NM		
CATEGORY	A	B	C	D	
S-ILS 13	1170/40		200 (200-¾)		
S-LOC 13	1300/40		330 (400-¾)		
CIRCLING	1460-1 482 (500-1)	1500-1 522 (600-1)	1540-1½ 562 (600-1½)	1580-2 602 (700-2)	