


LOC I-RGO	APP CRS	Rwy Idg	7000
109.5	189°	TDZE	1218
		Apt Elev	1226


ILS or LOC RWY 19
AKRON-CANTON RGNL (CAK)

▼ ** RVR 1800 authorized with the use of FD or AP or HUD to DA. For inoperative ALS, increase CAT C/D visibility to RVR 6000. ZEVLO fix minimums: For inoperative ALS, increase Cat C/D visibility to RVR 5500.	MALSR 	MISSED APPROACH: Climb to 1700 then climbing left turn to 3000 direct BSV VOR/DME and hold.
--	--	--


ATIS 121.05	CLEVELAND APP CON ★ 125.5 269.25	AKRON-CANTON TOWER 134.75 279.575	GND CON 121.7 348.6	CLNC DEL 132.05
----------------	-------------------------------------	--------------------------------------	------------------------	--------------------

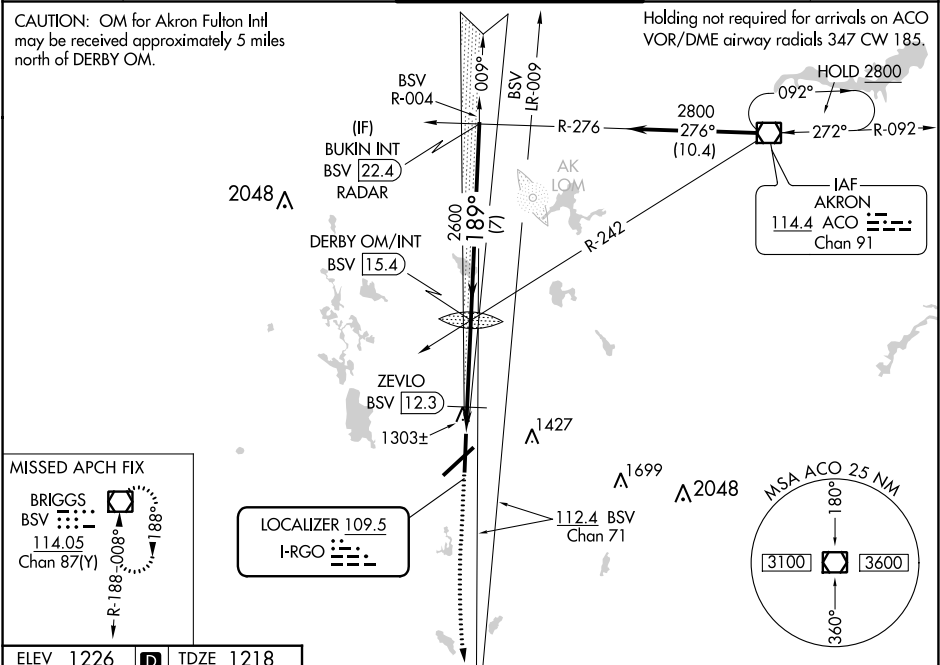

ELEV 1226	D	TDZE 1218
-----------	---	-----------



HIRL Rwy's 1-19 and 5-23					
FAF to MAP 4.2 NM					
Knots	60	90	120	150	180
Min:Sec	4:12	2:48	2:06	1:41	1:24

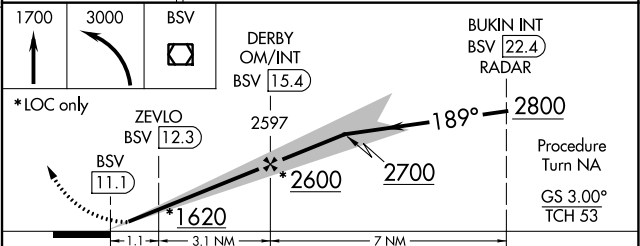	1700	3000	BSV	DERBY OM/INT BSV [15.4]	BUKIN INT BSV [22.4] RADAR
*LOC only					
CATEGORY	A	B	C	D	
S-ILS 19	**1418/24 200 (200-½)				
S-LOC 19	1620/24 402 (400-½)		1620/40 402 (400-¾)		
CIRCLING	1760-1 534 (600-1)		1780-1½ 554 (600-1½)		1800-2 574 (600-2)
ZEVLO FIX MINIMUMS					
S-LOC 19	1580/24 362 (400-½)				1580/40 362 (400-¾)
CIRCLING	1760-1 534 (600-1)		1780-1½ 554 (600-1½)		1800-2 574 (600-2)