



HI-ILS Y or LOC Y RWY 18

LOC I-EGI 111.7	APCH CRS 184°	Rwy Idg 8025 TDZE 191 Arpt Elev 195	AL-699 [USAF]	DUKE FLD (EGLIN AF AUX NR3) (KEGI)
* When ALS inop, increase RVR to 40, vis to ¾ mile. ** When ALS inop, increase RVR to 55, vis to 1 mile.			ALSF-1 	MISSED APPROACH: Climb on DWG R-002 to 8.5 DME (RUDDR), then climbing left turn to 2300 direct DWG R-033/23 DME (PAPPY) and hold.
ATIS ★ 244.575	EGLIN APP CON 125.1 281.45 (271°- 089°) 132.1 360.6 (090°- 270°)		TOWER ★ 133.2 290.425	GND CON 123.25 251.125

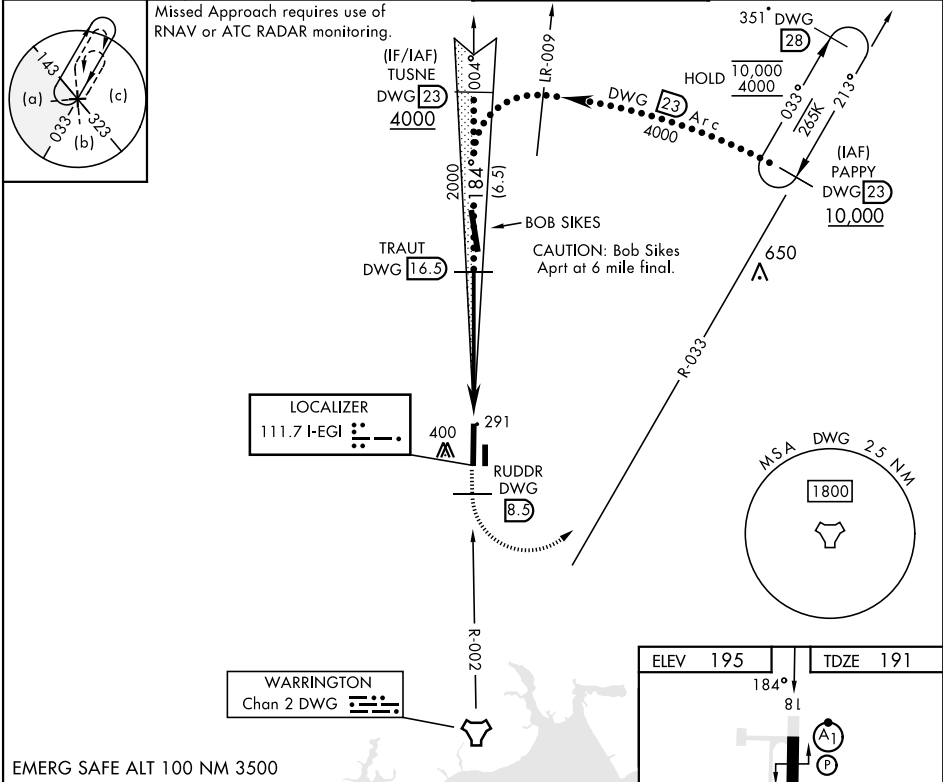

EMERG SAFE ALT 100 NM 3500

TUSNE 4000 184° 2000 16.5 12 5.5 NM		2300 DWG R-002	RUDDR DWG 8.5	DWG R-033
CATEGORY				
S-ILS 18 *				
S-LOC 18 **				
CIRCLING				

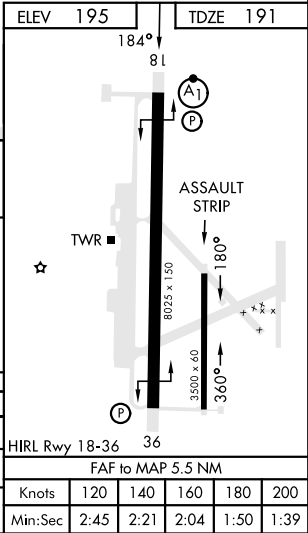

HI-ILS Y or LOC Y RWY 18