

WAAS CH 50310 W01A	APP CRS 007°	Rwy Idg TDZE 685 Apt Elev 690
--	------------------------	---

RNAV (GPS) RWY 1

ALPENA COUNTY RGNL (APN)

RNP APCH.


⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 48°C. When local altimeter setting not received, use Rogers City altimeter setting; increase all LPV DAs to 1029 feet, LNAV/VNAV DAs to 1084 feet and all MDAs 60 feet; increase LPV all Cats, LNAV/VNAV all Cats and LNAV Cats C and D visibility ½ SM. Baro-VNAV and VDP NA when using Roger City altimeter setting. For inop ALS, increase LPV all Cats visibility to 1 SM.

MALSR

MISSED APPROACH:
Climb to 3500 direct HIMVO and on track 307° to RABBO and hold.

ATIS	ALPENA APP CON ★	ALPENA TOWER ★	GND CON	UNICOM
120.675 327.05	128.425 379.3	121.35 (CTAF) 0 318.1	121.9 275.8	122.95

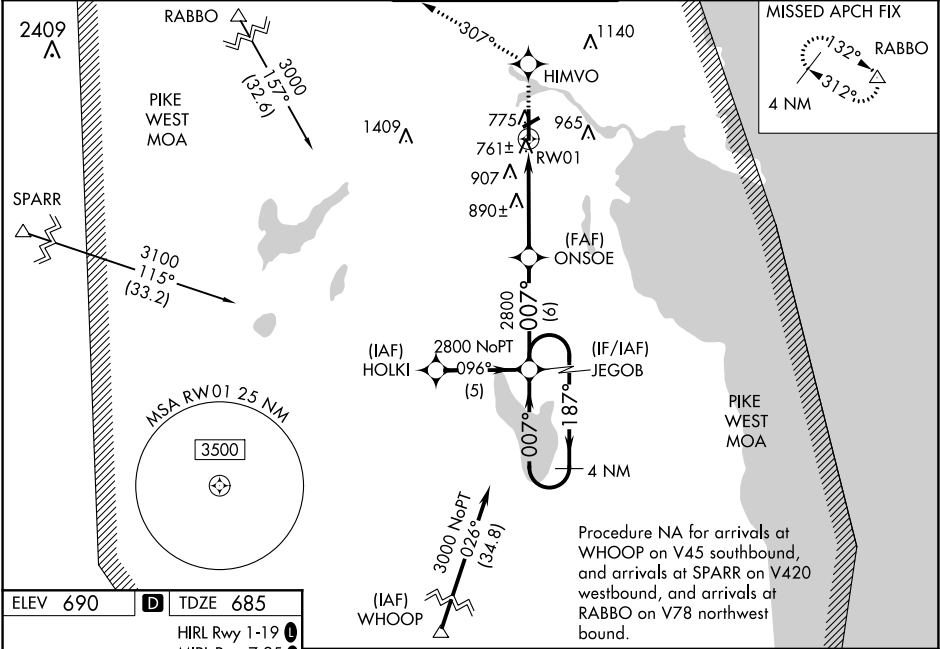

ELEV 690

D

TDZE 685

HIRL Rwy 1-19

MIRL Rwy 7-25

REIL Rwys 7, 19 and 25

	4 NM Holding Pattern	JEGOB	ONSOE	3500	HIMVO	tr 307°	RABBO
	2800	187°	007°	2800			
	GP 3.00° TCH 52						
		6 NM	5 NM	1.3			
CATEGORY	A	B	C	D			
LPV DA		974-½	289 (300-½)				
LNAV/VNAV DA		1029-¾	344 (400-¾)				
LNAV MDA	1160-½	475 (500-½)	1160-¾ 475 (500-¾)	1160-1 475 (500-1)			
CIRCLING	1160-1	470 (500-1)	1220-1½ 530 (600-1½)	1280-2 590 (600-2)			

EC-1, 18 APR 2024 to 16 MAY 2024

EC-1, 18 APR 2024 to 16 MAY 2024