

LOC/DME I-LFT	APP CRS	Rwy Idg	7659
109.5	216°	TDZE	38
Chan 32		Apt Elev	42

ILS or LOC RWY 22L
LAFAYETTE RGNL/PAUL FOURNET FLD (LFTT)

⚠ VDP NA with Acadiana Rgnl altimeter setting. When local altimeter setting not received, use Acadiana Rgnl altimeter setting and increase DA to 267 feet; increase all MDA 40 feet and S-LOC 22L visibility Cat C/D to RVR 5000 and Circling visibility Cat C/D ¼ SM. For inop MALSR when using Acadiana Rgnl altimeter setting, increase S-LOC 22L Cat C and D visibility to 1½ mile.

******RVR 1800 authorized with use of FD or AP or HUD to DA (NA when using Acadiana Rgnl altimeter setting).

MALSR
A5

MISSED APPROACH:
Climb to 800 then climbing right turn to 2100 on LFT VORTAC R-264 to MICRO INT/ LFT 16 DME and hold.

ATIS	LAFAYETTE APP CON *	LAFAYETTE TOWER *	GND CON	CLNC DEL	UNICOM
134.05	121.1 363.0	118.5 (CTAF) 0 257.8	121.8	125.55	122.95

ALTERNATE MISSED APCH FIX

LAFFS 375 LF


1242 A

MISSED APCH FIX

109.8 LFT
R-264
Chan 35

MICRO LFT 16

114.85 LLA
R-003
Chan 96(V)

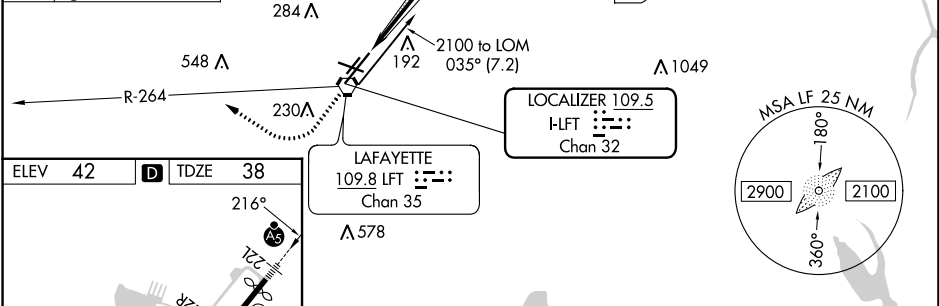

ELEV 42	D	TDZE 38
---------	---	---------

REIL Rwy 4L, 4R, 11, 22R and 29
MIRL Rwy 11-29 and 4L-22R
HIRL Rwy 4R-22L

FAF to MAP 5.9 NM

Knots	60	90	120	150	180
Min:Sec	5:54	3:56	2:57	2:22	1:58

800	2100	MICRO
↑	↘	△
LFT R-264		

*LOC only.

*H-F 2.6

H-F 1.4

1996

036°

216°

2100

2000

GS 3.00°
TCH 54

CATEGORY	A	B	C	D
S-ILS 22L**	238/24	200 (200-½)		
S-LOC 22L	480/24	442 (500-½)	480/45	442 (500-¾)
	540-1	580-1	700-1¾	700-2
C CIRCLING	498 (500-1)	538 (600-1)	658 (700-1¾)	658 (700-2)

SC-4, 18 APR 2024 to 16 MAY 2024

SC-4, 18 APR 2024 to 16 MAY 2024