

WAAS CH 45913 W14A	APP CRS 141°	Rwy Idg TDZE 258 Apt Elev 258
--	------------------------	---

RNAV (GPS) RWY 14

SHREVEPORT RGNL (SHV)

RNP APCH.

⚠

ASR

For inop ALS, increase LNAV Cat C and D visibility to RVR 6000.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C or above 54°C.


ALSF-2

ⓘ


ⓘ

MISSED APPROACH: Climb to 3000 direct COBAV and hold, continue to climb-in-hold to 3000.

ATIS 128.45	SHREVEPORT APP CON 119.9 335.55	SHREVEPORT TOWER 121.4 236.775	GND CON 121.175 236.775	CLNC DEL 124.65
-----------------------	---	--	-----------------------------------	---------------------------

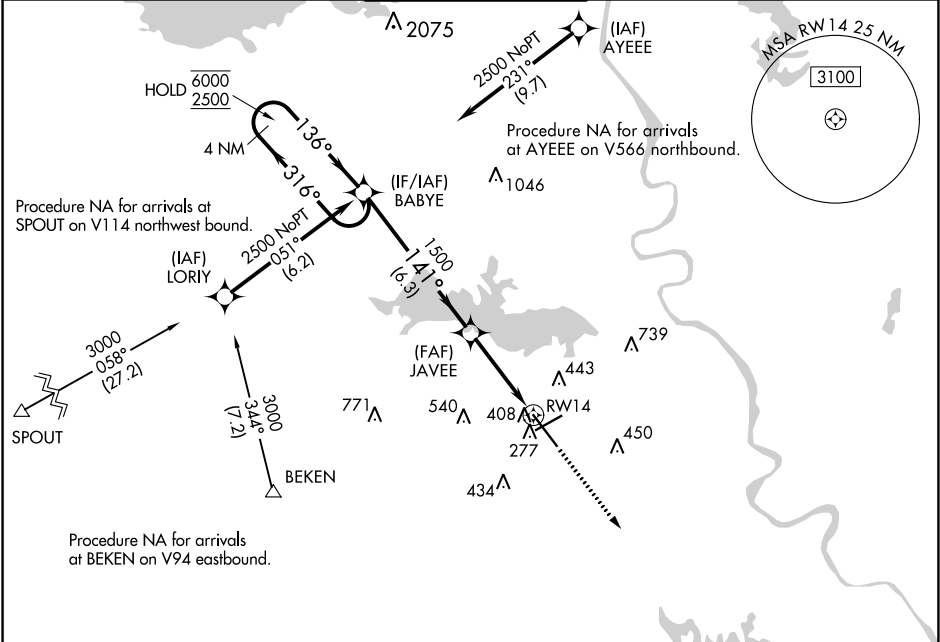

ELEV 258	D	TDZE 258
----------	----------	----------

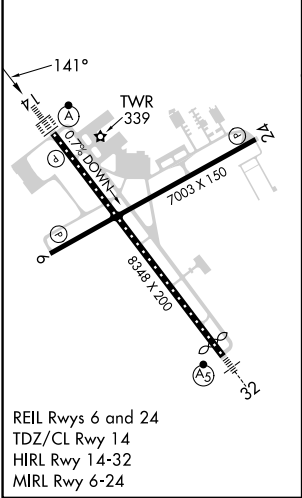

4 NM Holding Pattern				BABYE		3000 ↑		COBAY ✦	
6000		← 316°		141°		JAVEE		*1.1 NM to RW14	
2500		→ 136°		1500		1500		*INAV only.	
GP 3.00° TCH 51				6.3 NM		2.6 NM		1.1 NM	
CATEGORY		A		B		C		D	
LPV DA				458/18		200 (200-½)			
INAV/ VNAV		DA		640/40		382 (400-¾)			
INAV MDA		660/24		402 (500-½)		660/40		402 (500-¾)	
CIRCLING		760-1		502 (600-1)		980-2 722 (800-2)		1100-2¾ 842 (900-2¾)	