


LOC/DME I-GAD	APP CRS	Rwy Idg	6802
108.35	244°	TDZE	560
Chan 20(Y)		Apt Elev	569

ILS or LOC RWY 24
NORTHEAST ALABAMA RGNL (GAD)


▼ DME required. VDP NA when using Anniston altimeter setting. When local altimeter setting not received, use Anniston altimeter setting and increase DA to 845 feet and all visibilities ¼ SM: increase all MDAs 80 feet and visibility S-LOC Cats C and D ¼ SM and Circling Cat C ½ SM.

MISSED APPROACH: Climb to 3600 on GAD VOR/DME R-231 to STAMP/GAD 10 DME and hold, continue climb-in-hold to 3600.

AWOS-3PT 127.825	BIRMINGHAM APP CON 125.45 279.65	CLNC DEL 120.05 257.7	UNICOM 122.8 (CTAF) 0
---------------------	-------------------------------------	--------------------------	--------------------------

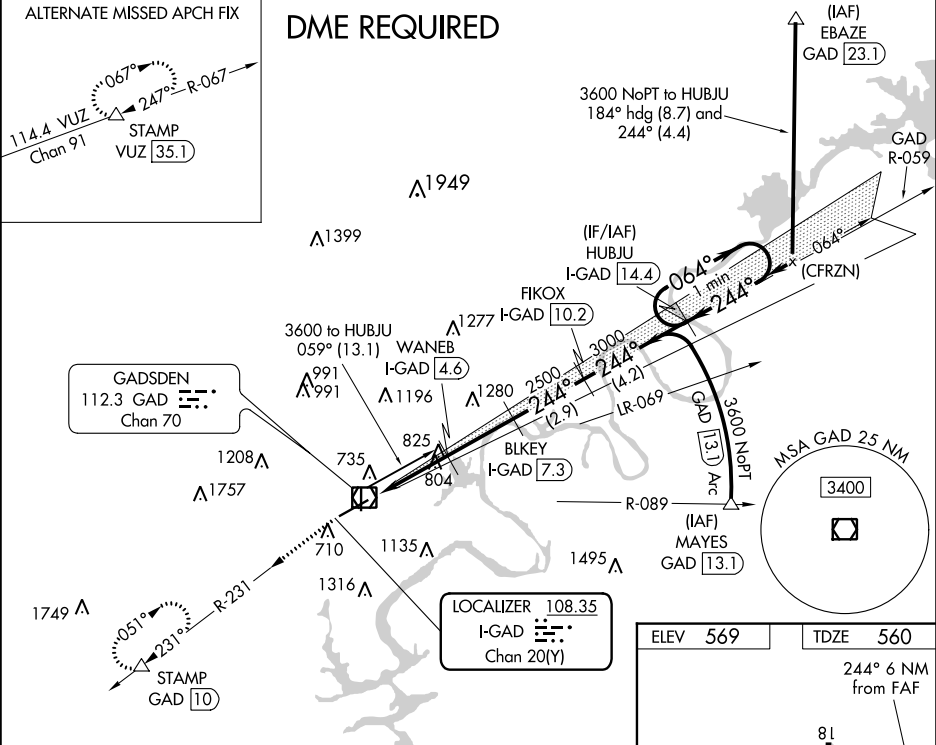

3600	GAD R-231	STAMP	Use I-GAD DME when on the localizer course.	HUBJU I-GAD 14.4	One Minute Holding Pattern
*LOC only.				FIKOX I-GAD 10.2	
				BLKEY I-GAD 7.3	
				WANE B I-GAD 4.6	
				I-GAD 1.3	
				1620*	
				2500	
				3000	
				244°	
				064°	
				3600	
				GS 3.00° TCH 43	
				1.7 NM	
				1.6 NM	
				2.7 NM	
				2.9 NM	
				4.2 NM	
CATEGORY	A	B	C	D	
S-ILS 24		779-¾	219 (300-¾)		
S-LOC 24	1140-1	580 (600-1)	1140-1¾	580 (600-1¾)	
CIRCLING	1140-1	571 (600-1)	1440-2½	1680-3	
			871 (900-2½)	1111 (1200-3)	

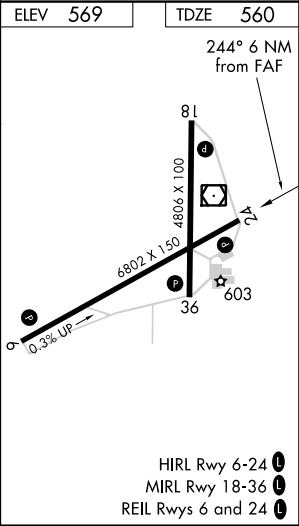

SE-4, 18 APR 2024 to 16 MAY 2024

SE-4, 18 APR 2024 to 16 MAY 2024