

ILS or LOC/DME RWY 14

LOC I-RVP
108.3

APCH CRS
141°

Rwy Idg **12,001**
THRE **5473**
Arprt Elev **5550**

AL-3188 [USAF]


TONOPAH TEST RANGE (KTNX)

▼ *When ALS inop, increase vis to ¼ mile.
**When ALS inop, increase CAT AB vis to 1 mile, CAT CDE to 1½ miles.
***Circling not authorized W of Rwy 14-32.

ALSf-1

MISSED APPROACH: Turn left climbing to 11,000 via TQQ R-340 to CIBMU and hold, continue climb-in-hold to 11,000.

AWOS 113.0	NELLIS CONTROL 119.35 254.4	SILVERBOW TOWER★ 124.75 257.95 0	GND CON 127.25 335.5
----------------------	---------------------------------------	--	--------------------------------

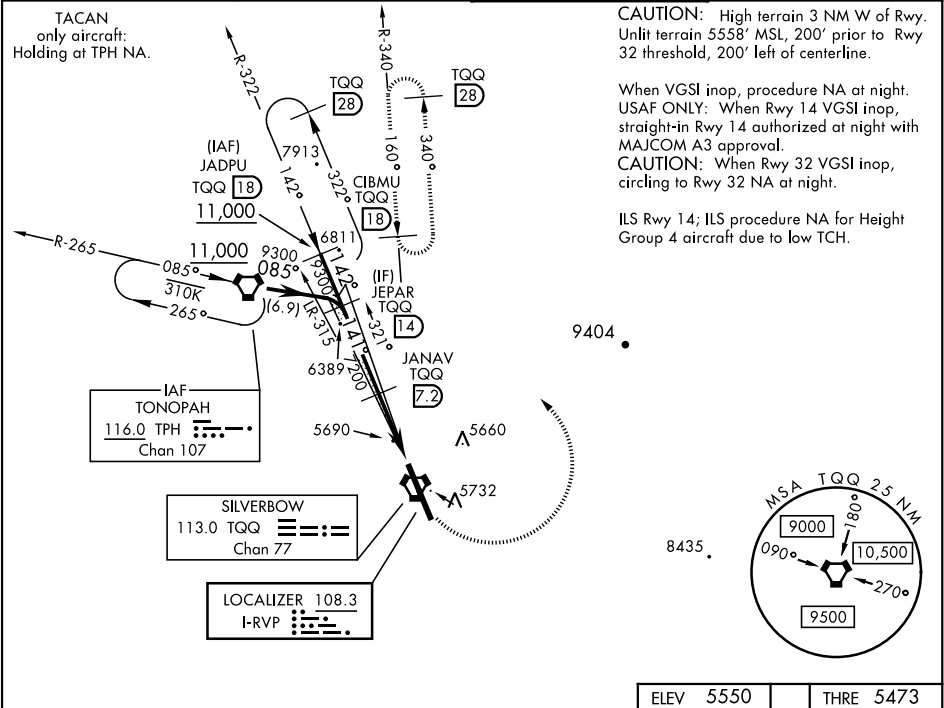

EMERG SAFE ALT 100 NM 16,600

VGSi and descent angles not coincident.

GS 2.75°
TCH 42

5.2 NM

0.5 NM

CATEGORY	A	B	C	D	E
S-ILS 14*	5673 - ½		200	(200-½)	
S-LOC 14**	5960-½ 487 (500-½)		5960-1	487	(500-1)
CIRCLING***	6040-1 490 (500-1)		6040-1½ 490 (500-1½)	6100-2 550	(600-2)

ELEV 5550 | THRE 5473

141° 5.7 NM from FAF

5477.

5568

5573.

12,000 x 150

TWR

HIRL Rwy 14-32