


GND CON		SHL-3188 [USAF]									
127.25 335.5				Rwy	Knots	60	120	180	240	300	360
SILVERBOW TOWER ★				14	ⓐ V/V(fpm)	300	600	900	1200	1500	1800
124.75 257.95				32	ⓑ V/V(fpm)	265	530	795	1060	1325	1590
NELLIS CONTROL											
119.35 254.4											
				Minimum Climb Rate							
				ⓐ to 10,700							
				ⓑ to 5900							

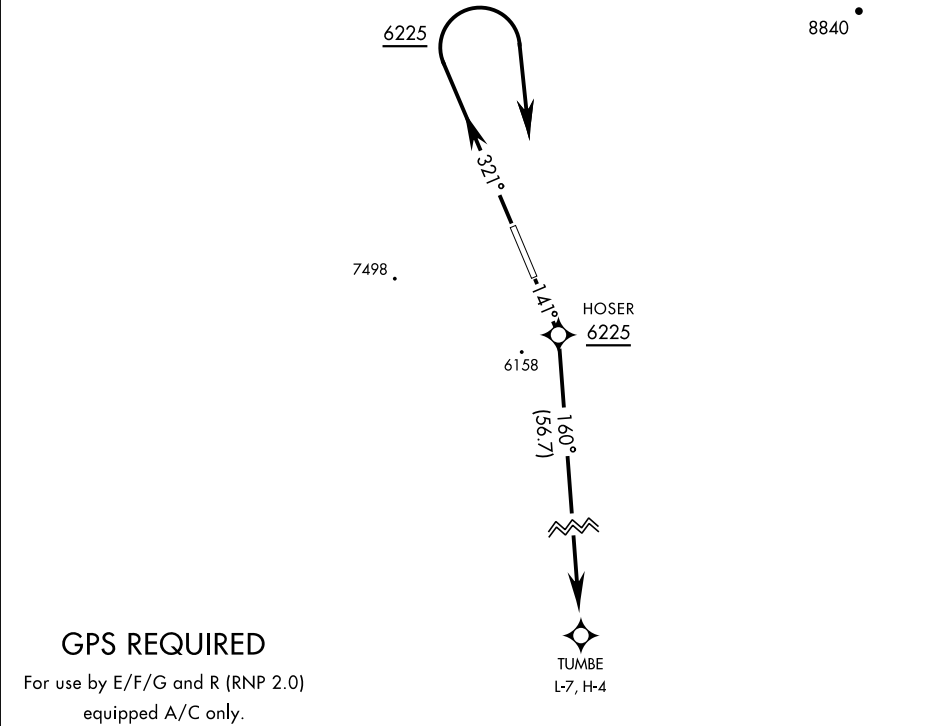

▼ DEPARTURE ROUTE DESCRIPTION	
TAKE-OFF RWY 14: Fly heading 141°, at 6225 (HOSER) turn right direct TUMBE.	
TAKE-OFF RWY 32: Fly heading 321°, at 6225 turn right direct TUMBE.	