

LOC/DME	I-BMI	APP CRS	Rwy Idg	6525
110.95		291°	TDZE	871
Chan 46 (Y)			Apt Elev	871

ILS or LOC RWY 29

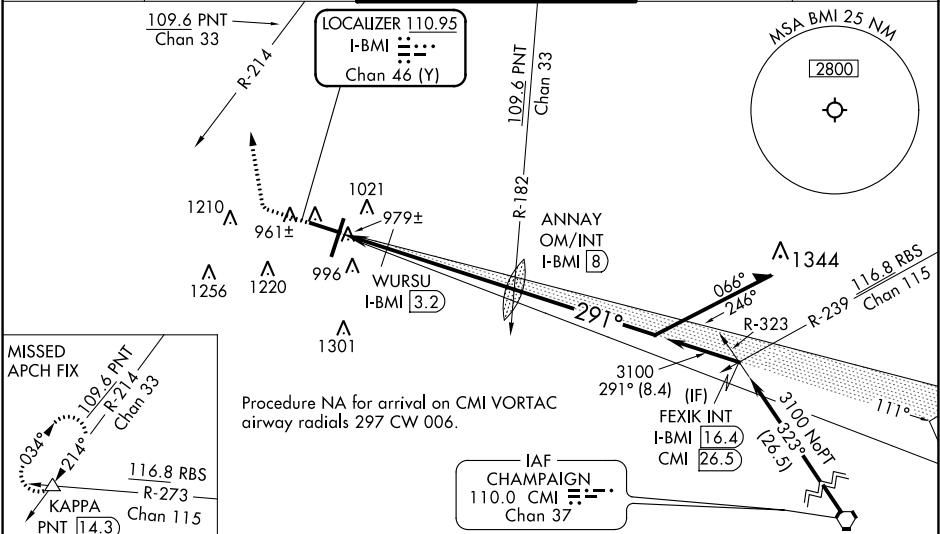
CENTRAL IL RGNL/BLOOMINGTON-NORMAL (BMI)

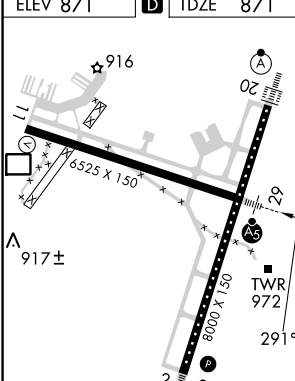
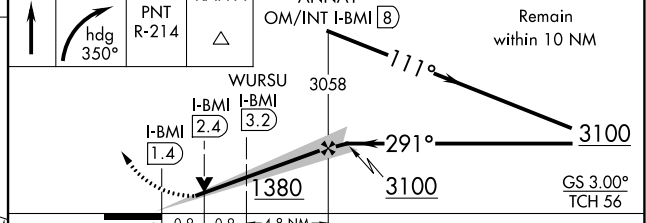
For inop ALS, increase S-LOC 29 Cats C and D visibility to 1½ SM and WURSU fix minimums Cats C and D visibility to RVR 5500.
**RVR 1800 authorized with use of FD or AP or HUD to DA (NA when using General Downing-Peoria Intl altimeter setting).

MALSR

MISSED APPROACH: Climb to 1500 then climbing right turn to 3000 on heading 350° and PNT VOR/DME R-214 to KAPPA INT/PNT 14.3 DME and hold.

ATIS	SAINT LOUIS APP CON	BLOOMINGTON TOWER ★	GND CON	UNICOM
135.35	128.725 256.9	124.6 (CTAF) 0 269.575	121.65	122.95



ELEV 871	D	TDZE 871	1500	3000	PNT R-214	KAPPA	ANNAY OM/INT I-BMI 8	Remain within 10 NM
								
TDZ/CL Rwy 20 1			WURSU I-BMI 3.2					
HIRL Rwy 2-20 and 11-29 1			I-BMI 2.4					
FAF to MAP 6.6 NM			I-BMI 1.4					
Knots 60 90 120 150 180			0.9 0.9 4.8 NM					
Min:Sec 6:36 4:24 3:18 2:38 2:12			CATEGORY A B C D					
			S-ILS 29 ** 1071/24 200 (200-½)					
			S-LOC 29 1380/24 509 (600-½) 1380/55 509 (600-1)					
			CIRCLING 1380-1 509 (600-1) 1620-2¼ 749 (800-2¼) 1620-2½ 749 (800-2½)					
			WURSU FIX MINIMUMS					
			S-LOC 29 1240/24 369 (400-½) 1240/35 369 (400-¾)					
			CIRCLING 1340-1 469 (500-1) 1620-2¼ 749 (800-2¼) 1620-2½ 749 (800-2½)					