

LOC I-CWF	APP CRS	Rwy Idg	10702
<u>110.7</u>	154°	TDZE	16
		Apt Elev	17

ILS or LOC RWY 15
CHENNAULT INTL (CWF)

ADF or DME required for procedure entry. ADF or DME required for LOC only.

V VDP: NA when using Lake Charles Rgnl altimeter setting. When local altimeter setting not received, use Lake Charles Rgnl altimeter setting: Increase DA to 2322 feet; Increase all MDAs 20 feet and visibility Circling Cat D $\frac{1}{4}$ SM. For inop ALS, increase S-ILS 15 Cat E visibility to $\frac{3}{4}$ SM, and S-LOC 15 Cats C/D/E to 1 $\frac{1}{2}$ SM. For inop ALS when using Lake Charles altimeter settings, increase S-ILS 15 Cat E visibility to $\frac{3}{4}$ SM, and S-LOC 15 Cats C/D/E to 1 $\frac{1}{2}$ SM. DME from LCH VORTAC. DME use requires simultaneous reception of I-CWF and LCH DME.


MALSR



MISSED APPROACH:
Climb to 2000 direct
LCH VORTAC and
hold, continue
climb-in-hold to 2000.

ATIS 120.0	LAKE CHARLES APP CON★ 119.8 282.3	CHENNAULT TOWER★ 124.2 (CTAF) 0 290.4	GND CON 121.65 275.8	UNICOM 122.95
----------------------	---	---	--------------------------------	-------------------------

ALTERNATE MISSED
APCH FIX

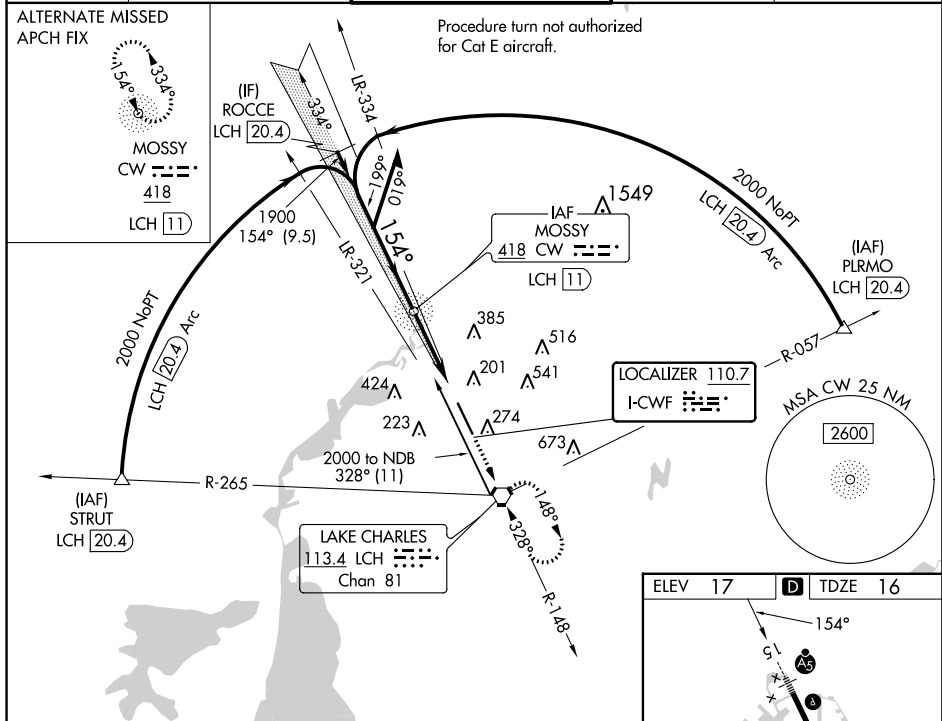

CATEGORY	A	B	C	D	E
S-ILS 15	216- $\frac{1}{2}$ 200 (200- $\frac{1}{2}$)				
S-LOC 15	480- $\frac{1}{2}$	464 (500- $\frac{1}{2}$)	480-1 464 (500-1)		
C CIRCLING	640-1	623 (700-1)	640- $1\frac{3}{4}$ 623 (700- $1\frac{3}{4}$)	740- $2\frac{1}{4}$ 723 (800- $2\frac{1}{4}$)	900-3 883 (900-3)

