

WAAS CH 82537 W24A	APP CRS 243°	Rwy Idg TDZE Apt Elev	5799 719 722
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 24

COLES COUNTY MEML (MTO)

⚠ DME/DME RNP-0.3 NA. When local altimeter setting not received, use Champaign/Urbana altimeter setting and increase all DA 82 feet, increase all MDA 100 feet, increase LPV all Cats visibility $\frac{1}{4}$ mile, LNAV/VNAV all Cats, LNAV Cats C/D and Circling Cat D visibility $\frac{1}{4}$ mile. Baro-VNAV and VDP NA when using Champaign/Urbana altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C (-2°F) or above 54°C (130°F). Circling NA to Rwy 18 and 36.

MISSED APPROACH: Climb to 1200 then climbing right turn to 3000 direct WUBTA and hold.

ASOS 118.475	CHAMPAIGN APP CON ★ 132.85 290.225	UNICOM 122.7 (CTAF) ①
------------------------	--	---------------------------------

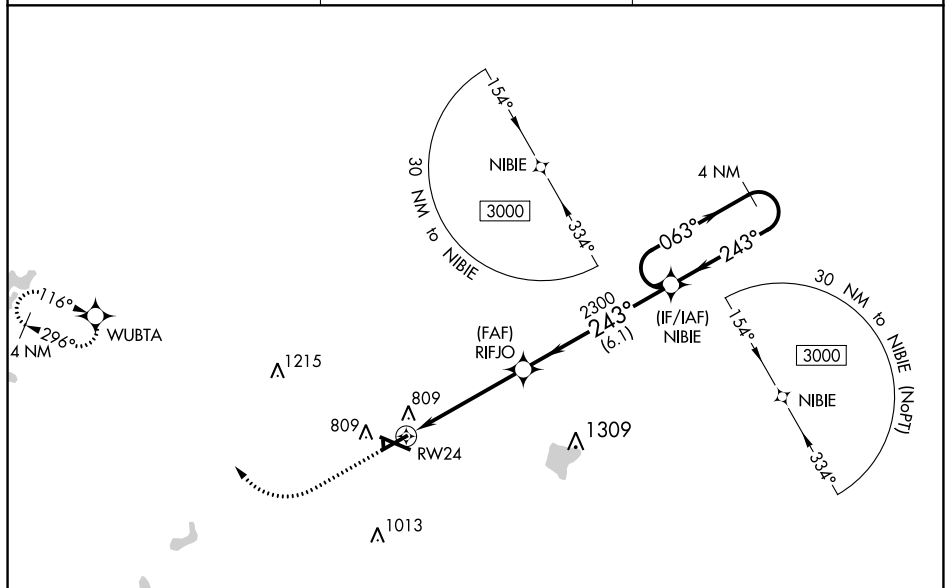

ELEV 722	D	TDZE 719
----------	----------	----------

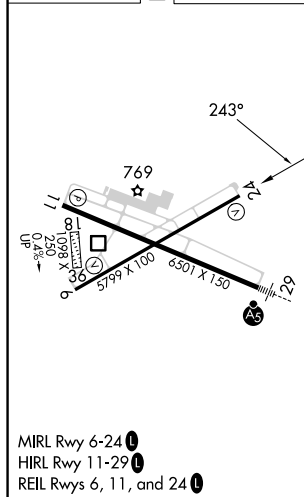


Diagram illustrating a 4 NM Holding Pattern for RW24. The pattern is defined by a 4 NM Holding Pattern. The diagram shows the following details:

- Navigation Aids:** WUBTA, RIFJO, NIBIE.
- Distances:** 1.1 NM to RW24, 3.7 NM, 6.1 NM.
- Angles:** 063°, 243°.
- Altitudes:** GP 3.00°, TCH 46.

CATEGORY	A	B	C	D
LPV DA	969-7/8	250 (300-7/8)		
LNAV/VNAV DA	1017-1	298 (300-1)		
LNAV MDA	1120-1	408 (500-1)	1120-1 1/2	408 (500-1 1/2)
CIRCLING	1160-1 438 (500-1)	1180-1 458 (500-1)	1240-1 1/2 518 (600-1 1/2)	1380-2 658 (700-2)