


WAAS CH 70711 W34A	APP CRS 340°	Rwy Idg 7100 TDZE 1232 Apt Elev 1232
--	------------------------	---

RNAV (GPS) RWY 34

BRAINERD LAKES RGNL (BRD)

RNP APCH.		MALSR 	MISSED APPROACH: Climb to 3300 direct KRINK and on track 294° to CUCAC and hold.
T A Baro-VNAV and VDP NA when using Aikin altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use Aikin altimeter setting; increase LPV DA to 1484, LNAV/VNAV DA to 1636 and LNAV/VNAV visibility ¼ SM; increase all MDAs 60 feet and LNAV Cats C and D visibility ¼ SM. For inop ALS when using Aikin altimeter setting, increase LNAV Cat D visibility to 1½ SM.			
ASOS 126.775		MINNEAPOLIS CENTER 118.05 239.0	UNICOM 122.7 (CTAF) 0

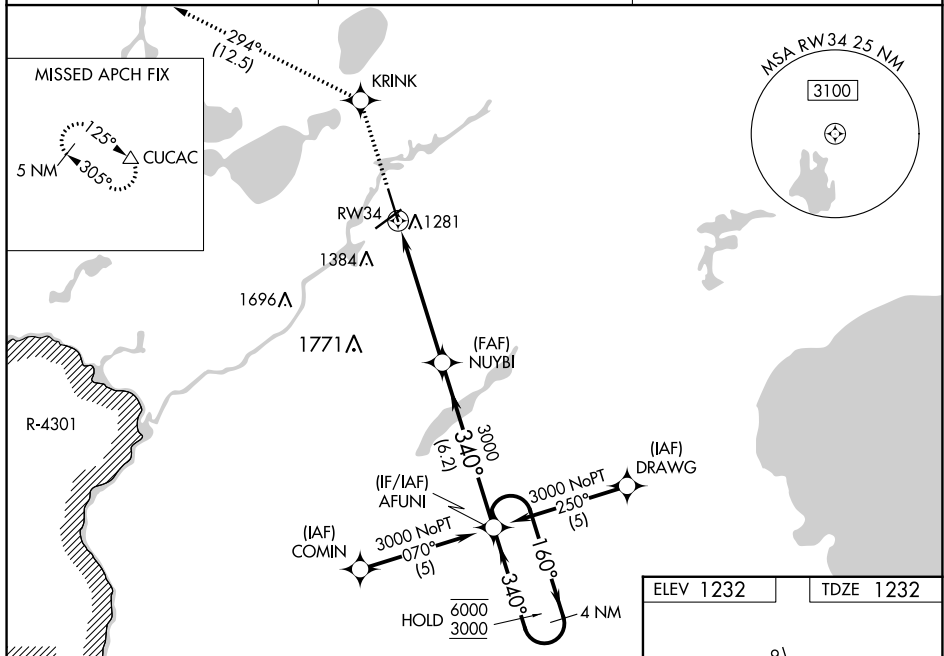

3300 ↑ KRINK ✱ CUCAC △ tr 294°		NUYBI AFUNI		4 NM Holding Pattern	
*LNAV only		*1 NM to RW34		6000 160° → 3000 ← 340°	
RW34		340°		3000	
1 NM		4.3 NM		6.2 NM	
CATEGORY		A		B	
LPV DA		1432-½		200 (200-½)	
LNAV/ VNAV		1584-¾		352 (400-¾)	
LNAV MDA		1620-½		388 (400-½)	
1620-5/8		388 (400-5/8)		1620-1	
388 (400-1)		1860-2		628 (700-2)	
CIRCLING		1760-1		528 (600-1)	
1760-1½		528 (600-1½)		1860-2	
628 (700-2)		GP 3.00°		TCH 46	

