


AUGUSTA DEP CON★
119.15 284.625
CLNC DEL
126.075
CTAF
122.8

TOP ALTITUDE:
ASSIGNED BY ATC

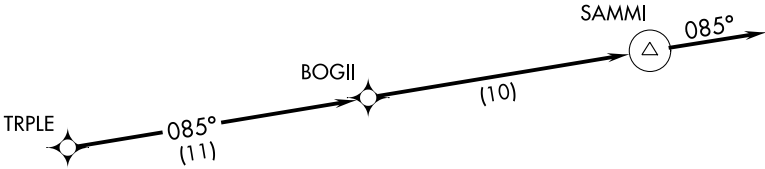

NOTE: RADAR and GPS required.
NOTE: RNAV 1.
NOTE: Do not exceed 250K until advised by ATC.

TAKEOFF MINIMUMS

Rwys 7, 25: Standard.
Rwy 1: 200-1¼ or standard with minimum climb of 220' per NM to 800,
or alternatively, with standard takeoff minimums and a normal 200'
per NM climb gradient, takeoff must occur no later than 1400' prior to DER.
Rwy 19: Standard with minimum climb of 201' per NM to 1300'.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RWY 1, 7, 19, 25: Climb on assigned heading for RADAR vectors to TRPLE.
Then on depicted route to SAMMI. Then on heading 085° for RADAR vectors. Thence. . .
. . . maintain altitude assigned by ATC. Expect clearance to filed altitude/flight level
within 10 minutes after departure.