

WAAS CH 42532 W28A	APP CRS 278°	Rwy Idg TDZE Apt Elev	5501 621 621
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 28

MANISTEE COUNTY/BLACKER (MBL)

RNP APCH - GPS.

⚠

Circling to Rwy 1, 19 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.


MALS

⚠

MISSED APPROACH:

Climb to 2500 direct GOSDE and hold.

AWOS-3PT 118.825	MINNEAPOLIS CENTER 120.85 322.35	UNICOM 122.8 (CTAF) 0
----------------------------	--	---------------------------------

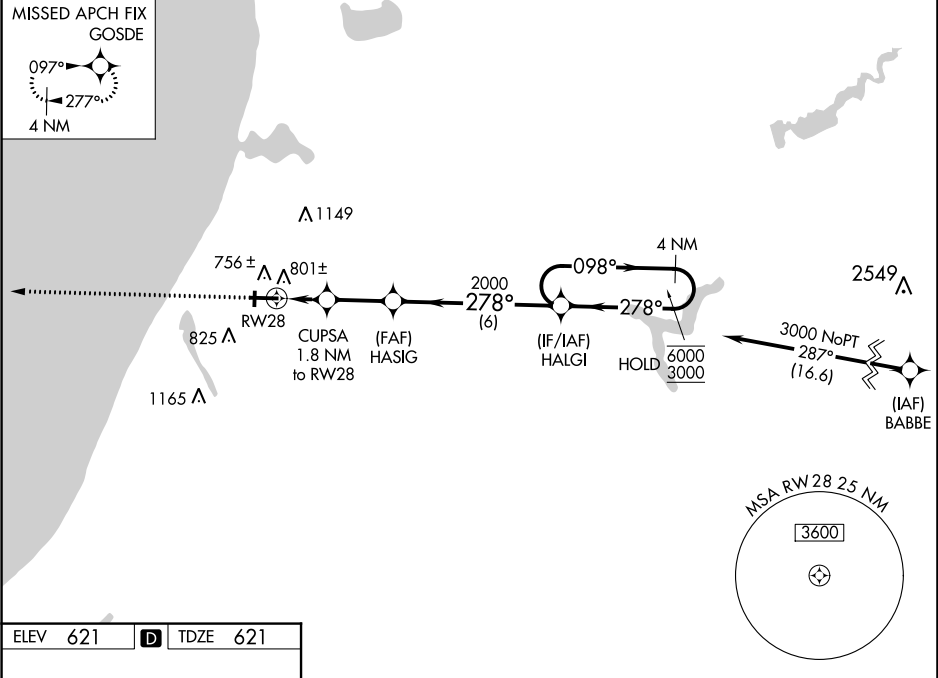

ELEV 621 D TDZE 621

61

10

277°

5501 X 100

28

278°

61

10

277°

5501 X 100

28

278°

HIRL Rwy 10-28 0

MIRL Rwy 1-19 0

REIL Rwy 10 0

2500	GOSDE	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 45).				4 NM
		CUPSA 1.8 NM to RW28	HASIG 2000	HALGI	098° → 6000	Holding Pattern
		1.2 NM to RW28	278°	278°	← 278°	3000
		1240	2000			GP 3.00°
		1.2 NM	0.6 NM	2.4 NM	6 NM	TCH 50
CATEGORY	A	B	C	D		
LPV DA	821-½		200 (200-½)			
LNAV/VNAV DA	984-⅝		363 (400-⅝)			
LNAV MDA	1060-½	439 (500-½)	1060-¾	439 (500-¾)		
CIRCLING	1160-1 539 (600-1)	1220-1 599 (600-1)	1400-2¼ 779 (800-2¼)	1500-2¾ 879 (900-2¾)		