
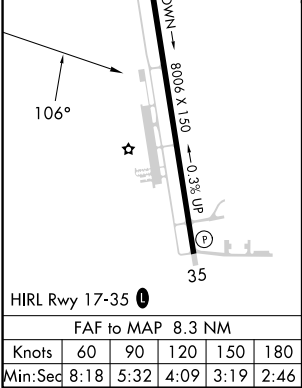
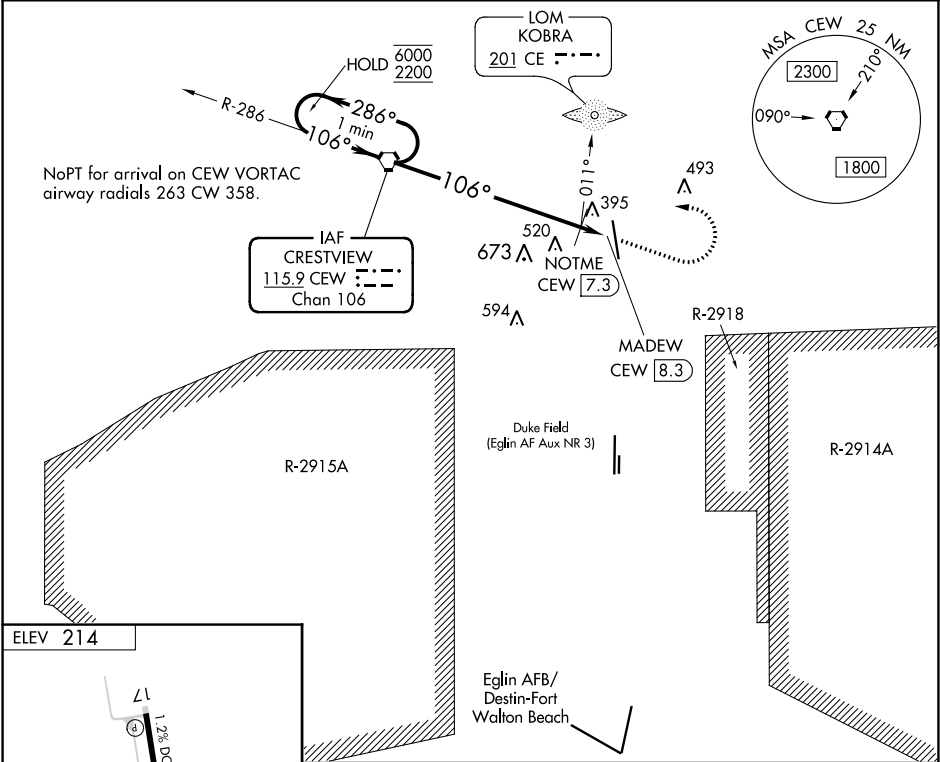



VORTAC CEW 115.9 Chan 106	APP CRS 106°	Rwy Idg TDZE Apt Elev N/A N/A 214	VOR-A BOB SIKES(CEW)
---	------------------------	---	--------------------------------

⚠ ⚠ Circling NA for Cat D west of Rwy 17-35. When local altimeter setting not received, use Eglin AFB altimeter setting and increase all MDA 60 feet and increase Circling Cat C/D visibility ¼ SM.	ASOS 119.275	EGLIN APP CON 124.05 284.65	UNICOM 122.95 (CTAF) 
--	------------------------------------	---	--



One Minute Holding Pattern		CEW VORTAC		1200 ↑	2200 ↷	CEW 
						
* 960 when using Eglin AFB altimeter setting.						
		7.3 NM		1 NM		
CATEGORY	A	B	C	D		
 CIRCLING	900-1 686 (700-1)		900-2 686 (700-2)		900-2¼ 686 (700-2¼)	
NOTME FIX MINIMUMS (ADF OR DME REQUIRED)						
 CIRCLING	700-1 486 (500-1)		820-1¾ 606 (700-1¾)		840-2 626 (700-2)	