

VORTAC EUF	APP CRS	Rwy Idg	5000
109.2	356°	TDZE	285
Chan 29		Apt Elev	285

VOR/DME RWY 36

WEEDON FLD (EUF)


▼

▲ NA

When local altimeter setting not received, use Columbus, GA altimeter setting and increase all MDAs 40 feet and S-36 visibility Cats C and D ½ SM and Circling Cats C and D ¼ SM. Rwy 36 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 1500 then climbing right turn to 2000 direct EUF VORTAC and hold.

ASOS 128.325	ATLANTA APP CON ★ 125.5 323.1	CINC DEL 134.25 339.8	UNICOM 122.8 (CTAF) 0
------------------------	---	---------------------------------	---------------------------------

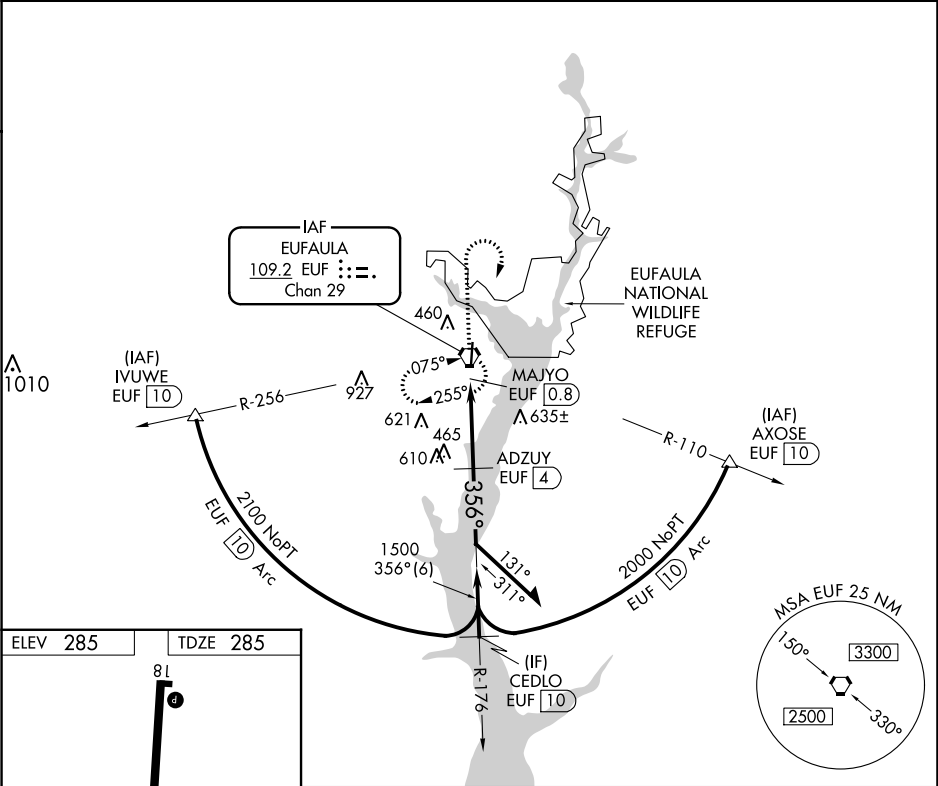

1500

2000

EUF

↑

↷

◻

VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 25).
EUF VORTAC

MAJYO EUF (0.8)

ADZUY EUF (4)

176°

2000

356°

1500

3.05°

TCH 40

0.5

3.2 NM

Remain within 10 NM

CATEGORY	A	B	C	D
S-36	780-1	495 (500-1)	780-1⅓	495 (500-1⅓)
CIRCLING	920-1	635 (700-1)	1060-2¼ 775 (800-2¼)	1060-2½ 775 (800-2½)