

WAAS CH 99313 W19A	APP CRS 190°	Rwy Idg 6604 TDZE 91 Apt Elev 91
--	------------------------	---


RNAV (GPS) RWY 19
H L SONNY CALLAHAN (CQF')

T Baro-VNAV NA when using Mobile Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 43°C (109°F).

A DME/DME RNP-0.3 NA. VDP NA with Mobile Intl altimeter setting. When local altimeter setting not received, use Mobile Intl altimeter setting and increase LPV DA to 383 feet, LNAV/VNAV DA to 555 feet and all MDA 60 feet; increase LNAV and Circling Cats C/D visibility ¼ SM.

MISSED APPROACH: Climb to 1500 then climbing right turn to 2000 direct BFM Vortac and hold.

AWOS-3PT 118.425	MOBILE APP CON ★ 118.5 269.3	UNICOM 123.0 (CTAF) 0
----------------------------	--	---------------------------------

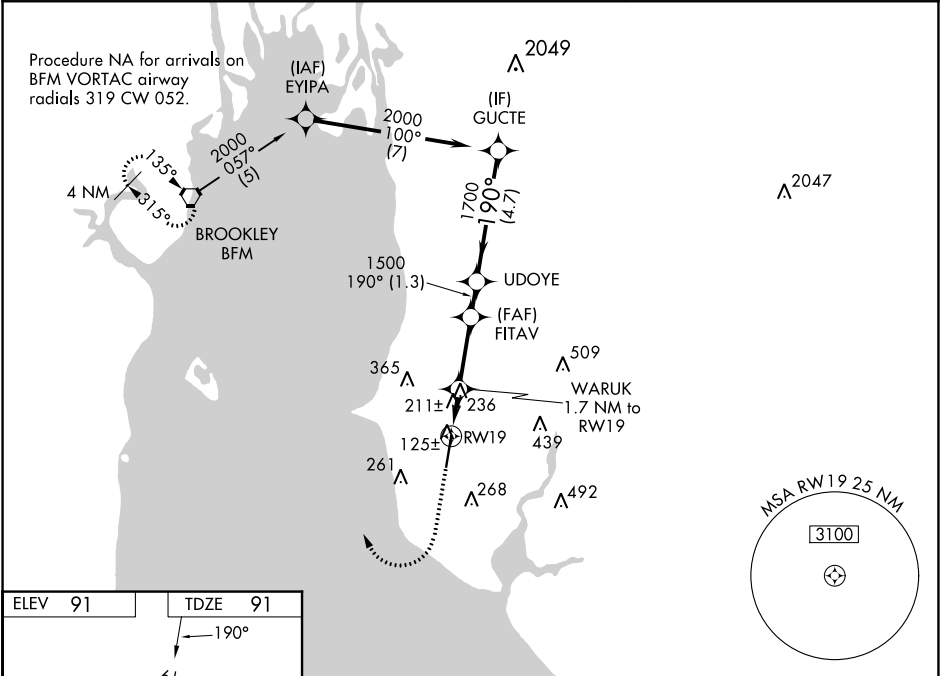

HIRL Rwy 1-19 **1**
REIL Rws 1 and 19 **1**

1500 2000 BFM										
*LNAV only. WARUK 1.7 NM to RW19 *1.2 NM to RW19 660* 1500 1700 190° GUOTE 2000 Procedure Turn NA GP 3.00° TCH 35										
1.2 0.5 2.6 1.3 NM 4.7 NM										
CATEGORY	A	B	C	D						
LPV DA	341-7 ⁸		250 (300-7 ⁸)							
LNAV/VNAV DA	513-1 ¹ ₂		422 (500-1 ¹ ₂)							
LNAV MDA	500-1	409 (500-1)		500-1 ¹ ₈		409 (500-1 ¹ ₈)				
CIRCLING	560-1	580-1		720-1 ³ ₄		740-2				
	469 (500-1)	489 (500-1)		629 (700-1 ³ ₄)		649 (700-2)				