

WAAS CH 81906 W16A	APP CRS 166°	Rwy Idg TDZE Apt Elev	5201 3432 3459
--	------------------------	-----------------------------	---

RNAV (GPS) Z RWY 16



BEND MUNI (BDN)

RNP APCH - GPS.

Baro-VNAV and VDP NA when using Redmond altimeter setting. Rwy 16 helicopter visibility reduction below $\frac{3}{4}$ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C. When local altimeter setting not received, use Redmond altimeter setting: increase LPV DA to 3763 feet and all visibilities $\frac{1}{4}$ SM; increase LNAV/VNAV DA to 3821 feet and all visibilities $\frac{1}{4}$ SM; increase all MDAs 100 feet and LNAV visibility Cats C and D $\frac{1}{4}$ SM, and Circling visibility Cat C $\frac{1}{2}$ SM.

MISSED APPROACH: Climb to 7400 direct JOGON and on track 087° to MIKKO and on track 038° to REMTE and hold, continue climb-in-hold to 7400.

AWOS-3 134.425	SEATTLE CENTER 126.15 269.475	UNICOM 123.0 (CTAF) 1
--------------------------	---	--

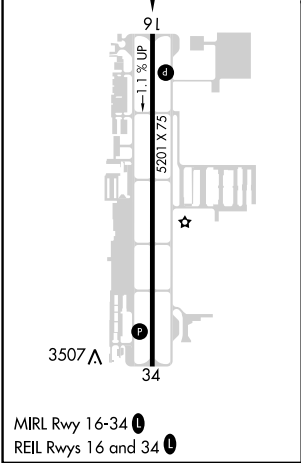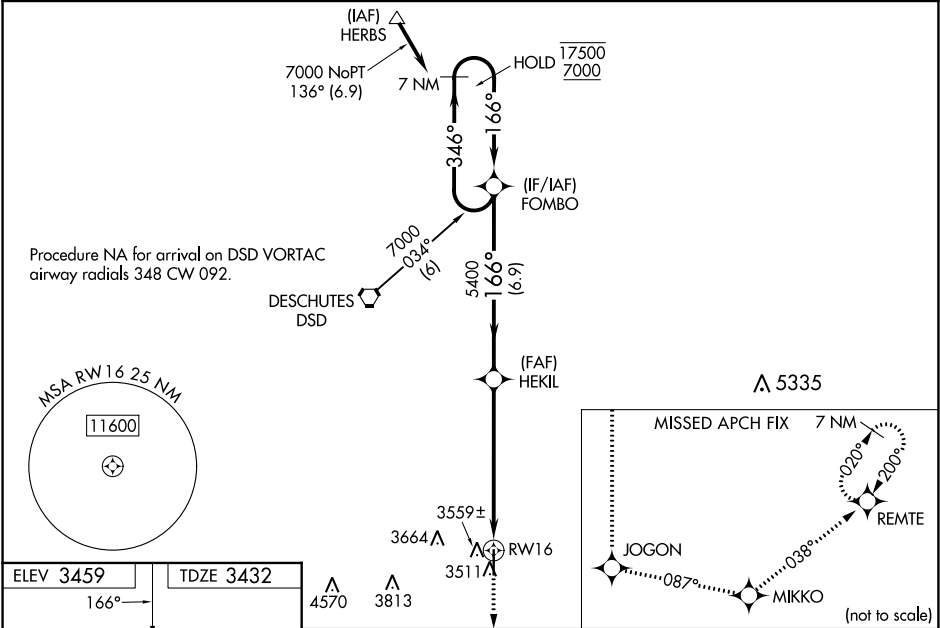

7400	JOGON	MIKKO	REMTE	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 38).
↑	tr 087°	tr 038°		
FOMBO 7 NM Holding Pattern				
HEKIL 5400				
1.2 NM to RW16				
RW16				
1.2 NM 4.9 NM 6.9 NM				
346° 17500 166° 7000				
GP 3.00° TCH 50				
CATEGORY	A	B	C	D
LPV DA	3682- $\frac{3}{4}$ 250 (300- $\frac{3}{4}$)			
LNAV/VNAV DA	3740- $\frac{7}{8}$ 308 (300- $\frac{7}{8}$)			
LNAV MDA	3820-1 388 (400-1)		3820-1 $\frac{1}{8}$ 388 (400-1 $\frac{1}{8}$)	
CIRCLING	3960-1 501 (600-1)	3980-1 521 (600-1)	4120-1 $\frac{3}{4}$ 661 (700-1 $\frac{3}{4}$)	4640-3 1181 (1200-3)