

WAAS CH 77713 W06A	APP CRS 061°	Rwy Idg TDZE Apt Elev	4000 786 786
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 6

SENECA COUNTY (16G)

RNP APCH.


▼

▲ NA

Circling to Rwy 24 NA at night. Baro-VNAV NA when using Findlay altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Findlay altimeter setting and increase all DA/MDA 60 feet, increase LPV all Cats ¼ SM and LNAV and Circling Cat C visibility ¼ SM.

MISSED APPROACH:
Climb to 2400 direct
VOBRY and hold.

AWOS-3 127.175	FDY ASOS 132.85	TOLEDO APP CON 120.8 317.55	UNICOM 123.0 (CTAF) 0
--------------------------	---------------------------	---------------------------------------	--

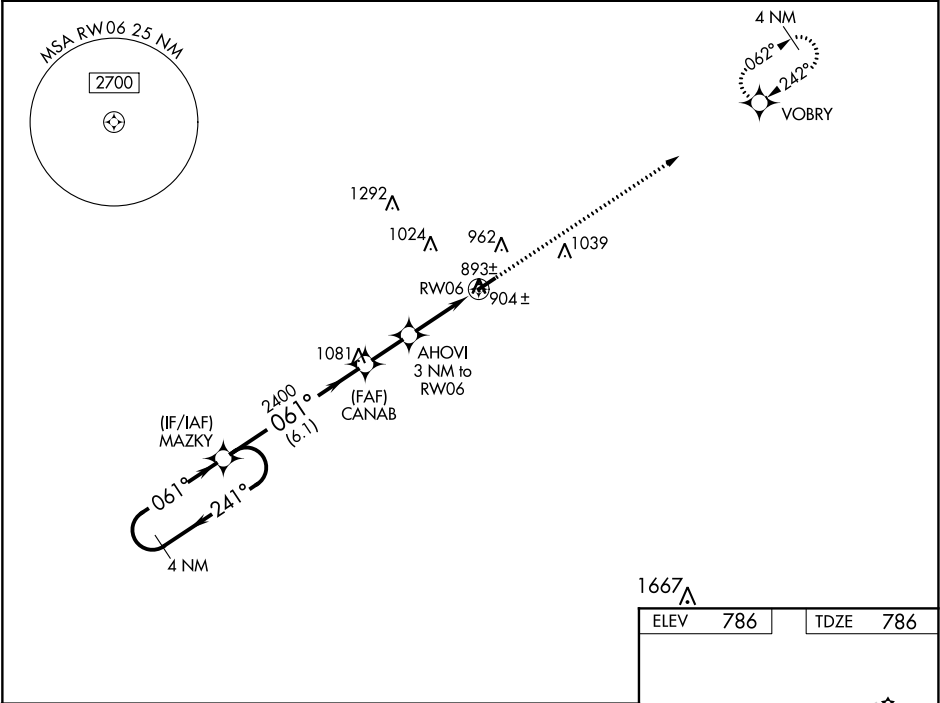

4 NM Holding Pattern		MAZKY	CANAB	AHOVI 3 NM to RW06	RW06
2400 ← 241° / 061° → 2400		2400	2400	*1780	
GP 3.00° TCH 38					
		6.1 NM	1.9 NM	3 NM	
CATEGORY		A	B	C	D
LPV DA		1137-1¼	351 (400-1¼)		NA
LNAV/VNAV DA		1174-1½	388 (400-1½)		NA
LNAV MDA		1160-1	374 (400-1)		NA
CIRCLING		1280-1	494 (500-1)	1340-1½ 554 (600-1½)	NA

ELEV 786 | TDZE 786

2400 ↑

VOBRY

*LNAV only.

4000 X 75

061°

MIRL Rwy 6-24 **0**
REIL Rwy 6 and 24 **0**