
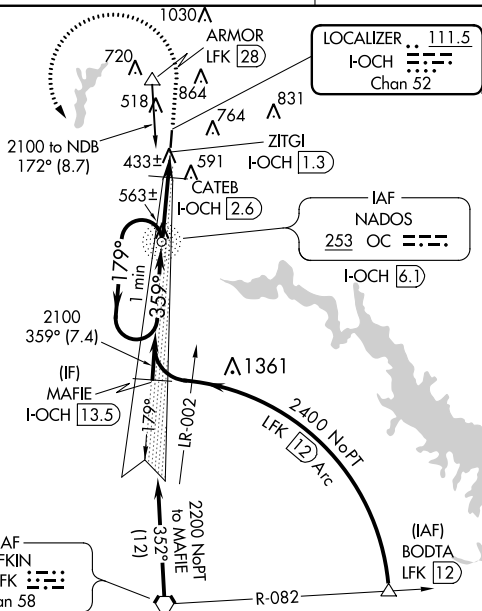


ILS or LOC RWY 36
NACOGDOCHES A L MANGHAM JR RGNL (OCH)

NA When local altimeter setting not received, use Lufkin altimeter setting: increase S-ILS 36 DA to 599 feet; increase all MDA 60 feet and visibility S-LOC 36 and Circling Cat C and CATEB FIX minimums S-LOC 36 and Circling Cat C ¼ SM. VDP NA when using Lufkin altimeter setting. Localizer unusable inside 0.3 NM from threshold. Autopilot coupled approach NA below 740.



MISSED APPROACH: Climb to 1000 then climbing left turn to 2100 direct NADOS/OC NDB and hold.

UNICOM
123.0 (CTAF) 


Procedure NA for arrival on LFK VORTAC
airway radials 318 CW 082.

ALTERNATE
MISSED APCH FIX

LUFKIN
LFK
112.1
Chan 58

* 820 when using Lufkin altimeter setting.

One Minute Holding Pattern

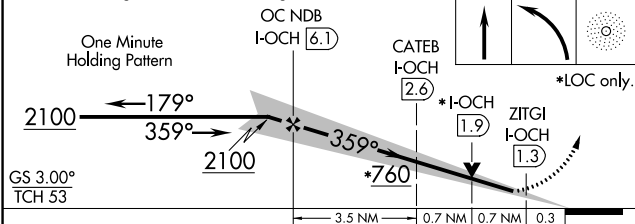

ELEV 343 TDZE 343

MIRL Rwy 18-36
REIL Rwys 18

81
5000 X 75
36
359°

FAF to MAP 4.8 NM

Knots	60	90	120	150	180
Min:Sec	4:48	3:12	2:24	1:55	1:36