

VORTAC FBC	APP CRS	Rwy Idg	4126
108.2	233°	TDZE	850
Chan 19		Apt Elev	851

VOR RWY 23
BLUFFTON (5G7)




Use Findlay altimeter setting; when not received, use Lima altimeter setting and increase all MDA 20 feet, increase S-23 Cat C 1/8 SM and Circling Cat C/D visibility 1/4 SM.



NA

MISSED APPROACH: Climb to 2500 then right turn direct FBC VORTAC and hold.

FDY ASOS 132.85	TOLEDO APP CON 120.8 317.55	UNICOM 122.8 (CTAF) 0
--------------------	--------------------------------	--------------------------

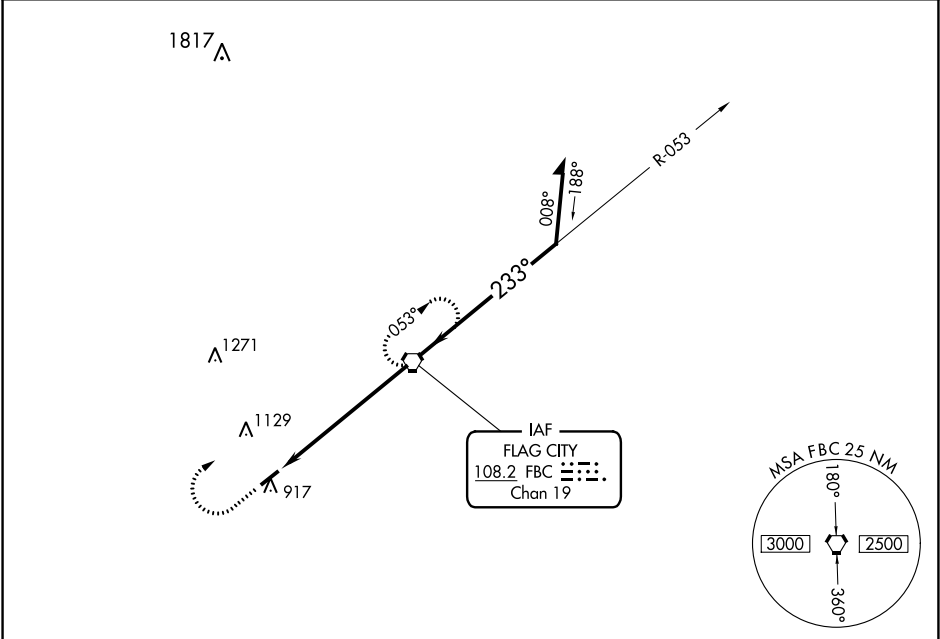



2500





FBC



FBC 6.3



FBC VORTAC

Remain within 10 NM




053°



233°




2500



6.3 NM

ELEV	851	TDZE	850
------	-----	------	-----



233° 6.3 NM from FAF

1007

4126 x 75

REIL Rwy 5 and 23 0

MIRL Rwy 5-23 0

FAF to MAP 6.3 NM

Knots	60	90	120	150	180
Min:Sec	6:18	4:12	3:09	2:31	2:06