


WAAS CH 69515 W24A	APP CRS 235°	Rwy Idg 6000 TDZE 681 Apt Elev 681
--	------------------------	---

RNAV (GPS) RWY 24
MAURY COUNTY RGNL (MRC)

RNP APCH. Inop table does not apply to LNAV/VNAV Cats A, B, and C and LNAV Cat C. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 47°C. Rwy 24 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Nashville Intl altimeter setting and increase LPV DA to 1090 feet and LNAV/VNAV DA to 1438 feet and increase all MDA 120 feet; increase LPV and LNAV/VNAV all Cats visibility ½ SM, and LNAV Cats C and D visibility ¼ SM, and increase Circling Cat C visibility ½ SM. Baro-VNAV and VDP NA when using Nashville Intl altimeter setting.	ODALS MISSED APPROACH: Climb to 3000 direct CEMVU and hold.
--	---

AWOS-3 128.625	MEMPHIS CENTER 125.85 379.25	UNICOM 122.8 (CTAF) 1
--------------------------	--	---------------------------------

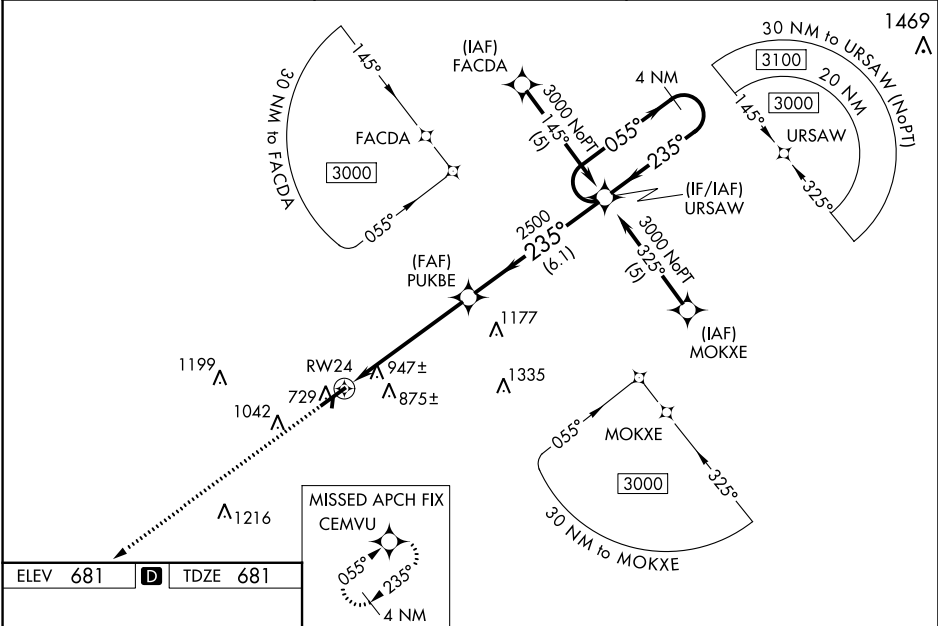

ELEV 681 D TDZE 681	MISSED APCH FIX CEMVU 055° 235° 4 NM	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 42).	4 NM Holding Pattern
3000 ↑ CEMVU	*LNAV only. RW24 *1.6 NM to RW24 PUKBE 2500	URSAW 055° 235° 3000	GP 3.00° TCH 40

1941 X 95 0.3% UP 35	6000 X 100 0.4% UP	1.6 NM	3.9 NM	6.1 NM	CATEGORY	A	B	C	D
MIRL Rwy 6-24 REIL Rwy 6 REIL Rwy 24 1					LPV DA	981-1	300 (300-1)		
					LNAV/VNAV DA	1329-2¼	648 (700-2¼)		
					LNAV MDA	1220-¾ 539 (600-¾)	1220-1½ 539 (600-1½)	1220-1¾ 539 (600-1¾)	
					CIRCLING	1320-1 639 (700-1)	1360-1 679 (700-1)	1380-2 699 (700-2)	1620-3 939 (1000-3)

SE-1, 18 APR 2024 to 16 MAY 2024

SE-1, 18 APR 2024 to 16 MAY 2024