


WAAS CH 65833 W25A	APP CRS 254°	Rwy Idg TDZE Apt Elev	3805 1197 1197
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 25
MONROE COUNTY (4G5)

RNP APCH. ▼ NA Rwy 25 helicopter visibility reduction below 1 SM NA. Use Wheeling Ohio Co, WV altimeter setting; when not received use Parkersburg, WV altimeter setting and increase all MDA 60 feet; increase LP Cat C, LNAV Cat C and Circling Cat C visibility ¼ SM. Procedure NA at night.	MISSED APPROACH: Climb to 1900 then climbing right turn to 3000 direct ZUPEN and hold.
---	--

CLEVELAND CENTER 126.95 239.3	UNICOM 122.8 (CTAF) 0
---	---------------------------------

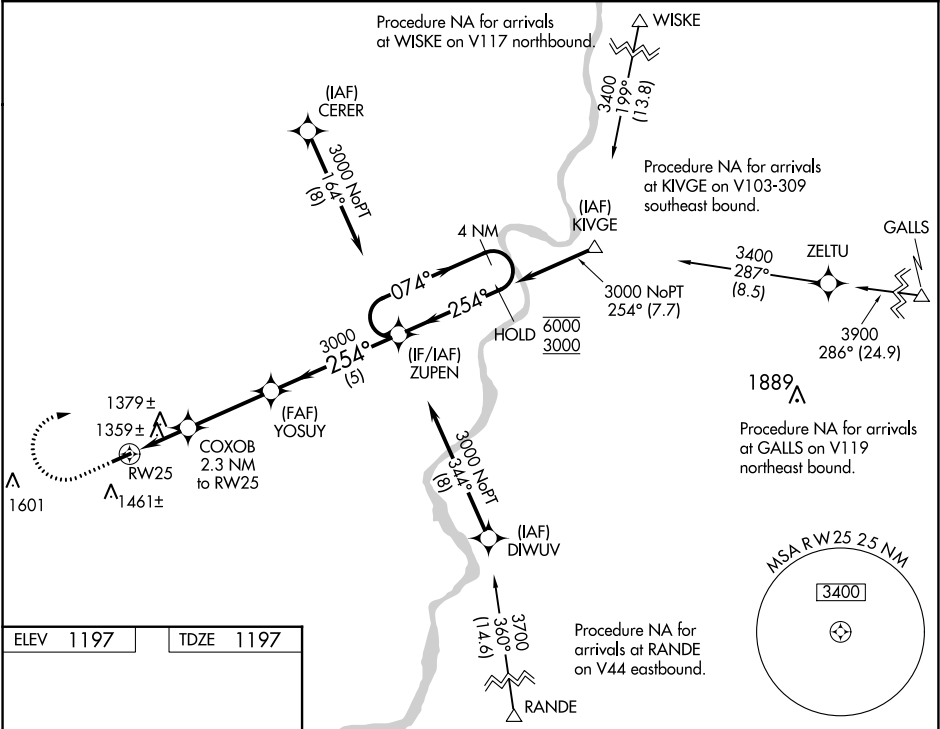

ELEV 1197	TDZE 1197
------------------	------------------

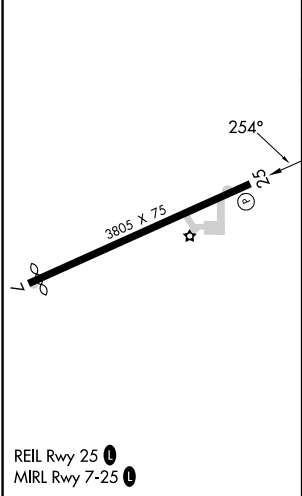

Visual Segment - Obstacles.				
4 NM Holding Pattern				
CATEGORY	A	B	C	D
LP MDA	1700-1	503 (600-1)	1700-1 3/8 503 (600-1 3/8)	NA
LNAV MDA	1720-1	523 (600-1)	1720-1 1/2 523 (600-1 1/2)	NA
CIRCLING	1860-1	663 (700-1)	1860-1 3/4 663 (700-1 3/4)	NA