

WAAS CH 49035 W27A	APP CRS 273°	Rwy Idg TDZE 1198 Apt Elev 1198
--	------------------------	---

RNAV (GPS) RWY 27



PORTAGE COUNTY (POV)

▼ Baro-VNAV NA when using Akron-Canton Rgnl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA.

▲ When local altimeter setting not received, use Akron-Canton Rgnl altimeter setting and increase all DA 50 feet and all MDA 60 feet; increase LPV all Cats visibility 1/8 mile, LNAV/VNAV all Cats visibility 1/4 mile and Circling Cat C visibility 1/4 mile. Helicopter visibility reduction below 1 SM NA. Night landing Cat C: Procedure NA.

MISSED APPROACH:
Climb to 4000 direct
IWWEB and hold.

AWOS-3 118.675	CLEVELAND APP CON* 125.5 371.875	CLNC DEL 125.65	UNICOM 123.05 (CTAF) 1
--------------------------	--	---------------------------	----------------------------------

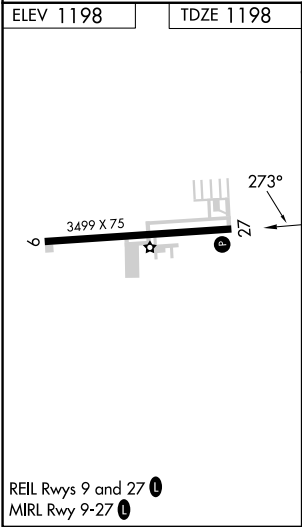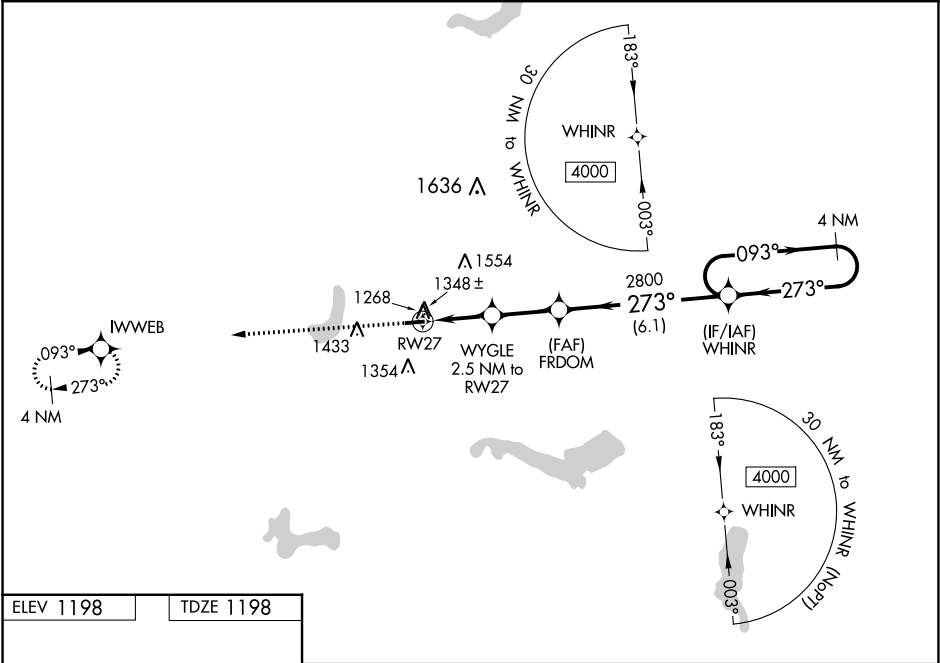

4000	IWWEB	FRDOM	WHINR	4 NM Holding Pattern
*LNAV only	WYGLE 2.5 NM to RW27	2800	273°	093° 4000
RW27	*2020	2800	273°	GP 3.00° TCH 43
2.5 NM	2.4 NM	6.1 NM		
CATEGORY	A	B	C	D
LPV DA	1471-1	273 (300-1)		NA
LNAV/VNAV DA	1546-1 1/8	348 (400-1 1/8)		NA
LNAV MDA	1640-1	442 (500-1)	1640-1 3/8 442 (500-1 3/8)	NA
CIRCLING	1740-1 542 (600-1)	1800-1 602 (700-1)	1920-2 722 (800-2)	NA

REIL Rwy 9 and 27 1
MIRL Rwy 9-27 1