

|            |         |          |      |
|------------|---------|----------|------|
| VORTAC LAL | APP CRS | Rwy Idg  | 3950 |
| 116.0      | 275°    | TDZE     | 154  |
| Chan 107   |         | Apt Elev | 154  |


VOR RWY 28  
PLANT CITY (PCM)

**⚠️ NA**

When local altimeter setting not received, use Lakeland altimeter setting and increase all MDA 20 feet. Straight-in and Circling Rwy 28 NA at night. Rwy 28 helicopter visibility reduction below 1 SM NA.

**MISSED APPROACH:** Climbing right turn to 2000 direct LAL VORTAC and hold.

|                   |                               |                           |                                  |
|-------------------|-------------------------------|---------------------------|----------------------------------|
| AWOS-3<br>120.025 | TAMPA APP CON<br>120.65 290.3 | CLNC DEL<br>121.725 (GCO) | UNICOM<br>123.05 (CTAF) <b>0</b> |
|-------------------|-------------------------------|---------------------------|----------------------------------|

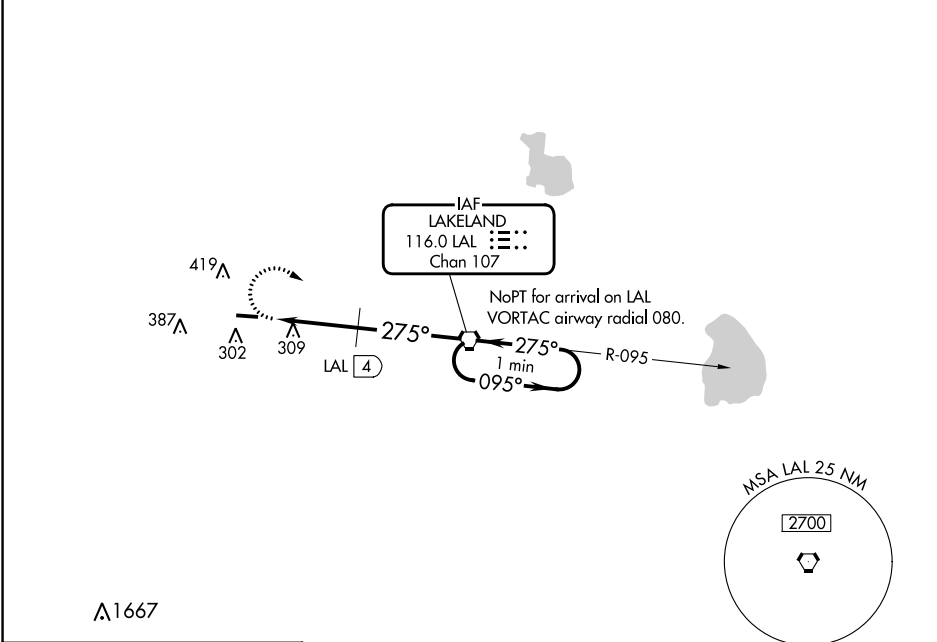

ELEV 154

TDZE 154

MIRL Rwy 10-28 **0**

REIL Rws 10 and 28 **0**

FAF to MAP 7.7 NM

|         |      |      |      |      |      |
|---------|------|------|------|------|------|
| Knots   | 60   | 90   | 120  | 150  | 180  |
| Min:Sec | 7:42 | 5:08 | 3:51 | 3:05 | 2:34 |

|                   |                   |                   |                            |   |
|-------------------|-------------------|-------------------|----------------------------|---|
| 2000              |                   | LAL               | One Minute Holding Pattern |   |
|                   |                   | LAL VORTAC        |                            |   |
| LAL 7.7           |                   | LAL 4             | 800                        |   |
| 3.7 NM            |                   | 4 NM              |                            |   |
| CATEGORY          | A                 | B                 | C                          | D |
| S-28              | 800-1 646 (700-1) |                   | NA                         |   |
| <b>C</b> CIRCLING | 800-1 646 (700-1) |                   | NA                         |   |
| DME MINIMUMS      |                   |                   |                            |   |
| S-28              | 600-1 446 (500-1) |                   | NA                         |   |
| <b>C</b> CIRCLING | 700-1 546 (600-1) | 800-1 646 (700-1) | NA                         |   |