


|                                                 |                        |                                                                          |                                         |
|-------------------------------------------------|------------------------|--------------------------------------------------------------------------|-----------------------------------------|
| LOC/DME F-HDN<br><b>109.9</b><br>Chan <b>36</b> | APP CRS<br><b>104°</b> | Rwy Idg<br>TDZE<br>Apt Elev<br><b>9490</b><br><b>6591</b><br><b>6606</b> | ILS or LOC RWY 10<br>YAMPA VALLEY (HDN) |
|-------------------------------------------------|------------------------|--------------------------------------------------------------------------|-----------------------------------------|

|                                                                                                                                      |       |                                                                                                                                                                                                                                                   |
|--------------------------------------------------------------------------------------------------------------------------------------|-------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DME required.                                                                                                                        | MALSF | MISSED APPROACH: Climb to 8000 then climbing right turn to 13300 on heading 130° and on CHE VOR/DME R-114 to TILLI/CHE 27.9 DME and hold, continue climb-in-hold to 13300.<br>*Missed approach requires minimum climb of 307 feet per NM to 8700. |
| NA<br>Inop table does not apply to *S-ILS 10 all Cats and S-LOC Cats C/D. For inop ALS, increase S-ILS all Cats visibility to 2½ SM. |       |                                                                                                                                                                                                                                                   |

|                            |                                         |                               |
|----------------------------|-----------------------------------------|-------------------------------|
| AWOS-3PT<br><b>119.275</b> | DENVER CENTER<br><b>120.475 235.975</b> | UNICOM<br><b>123.0 (CTAF)</b> |
|----------------------------|-----------------------------------------|-------------------------------|

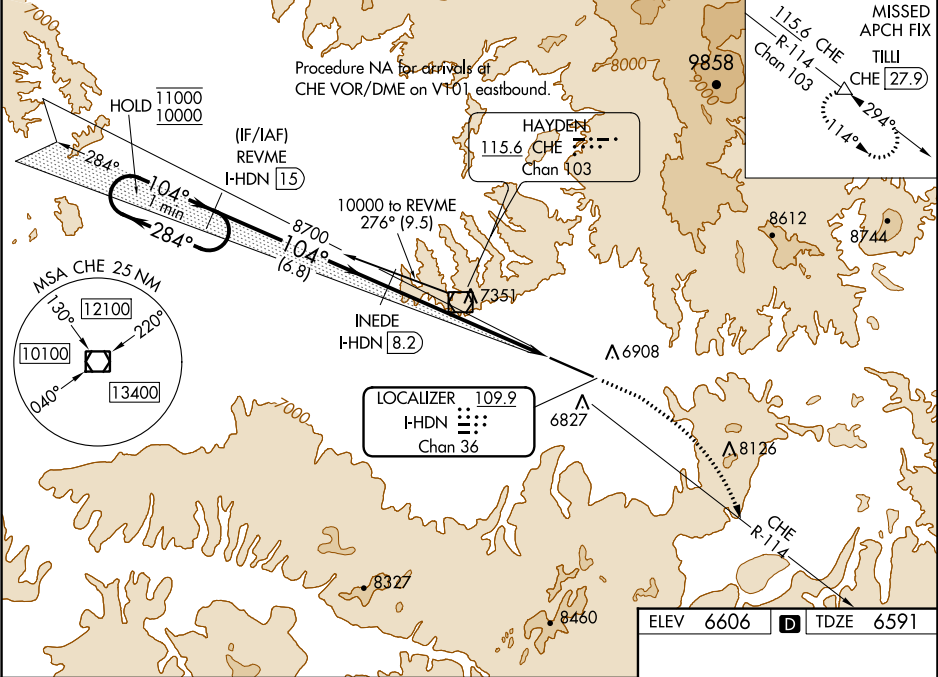

|                            |                           |                           |                                                                                     |                                                                                              |                |
|----------------------------|---------------------------|---------------------------|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|----------------|
| One Minute Holding Pattern |                           | REVME I-HDN [15]          | 8000                                                                                | 13300                                                                                        | TILLI          |
|                            |                           |                           |  |  hdg 130° | CHE R-114<br>△ |
| 11000 ← 284°               | 10000 → 104°              | 104°                      | 8700                                                                                | I-HDN [5.2]                                                                                  | I-HDN [1.7]    |
| GS 3.00°<br>TCH 55         |                           |                           | 8700                                                                                |                                                                                              |                |
|                            |                           | 6.8 NM                    | 3 NM                                                                                | 3.5 NM                                                                                       |                |
| CATEGORY                   | A                         | B                         | C                                                                                   | D                                                                                            |                |
| S-ILS 10*                  | 6791-¾ 200 (200-¾)        |                           |                                                                                     |                                                                                              |                |
| S-ILS 10                   | 7414-2 823 (900-2)        |                           |                                                                                     |                                                                                              |                |
| S-LOC 10                   | 7760-1<br>1169 (1200-1)   | 7760-1¼<br>1169 (1200-1¼) | 7760-3                                                                              | 1169 (1200-3)                                                                                |                |
| CIRCLING                   | 7760-1¼<br>1154 (1200-1¼) | 7760-1½<br>1154 (1200-1½) | 7760-3                                                                              | 8180-3                                                                                       |                |
|                            |                           |                           | 1574 (1600-3)                                                                       |                                                                                              |                |

104° 6.5 NM from FAF

6639

10000 X 130

0.3% DOWN

104°