

LOC I-HPF 111.5	APP CRS 180°	Rwy Idg 5001 TDZE 44 Apt Elev 46
---------------------------	------------------------	---

ILS or LOC RWY 18

HAMMOND NORTHSORE RGNL (HDC)

ADF required.



▼
NA

For inop ALS, increase S-LOC 18 Cat C/D visibility to 1½ SM. When local altimeter setting not received, use Louis Armstrong New Orleans Intl altimeter setting and increase S-ILS 18 DA to 339 feet; increase all MDAs 100 feet and S-LOC 18 visibility Cat C/D ¼ SM, and Circling visibility Cat C/D ½ SM. For inop ALS when using Louis Armstrong New Orleans Intl altimeter setting, increase S-ILS all Cats visibility to ½ SM.


MALSR

MISSED APPROACH:
Climb to 1800 then left turn on 345° bearing to ANGER LOM and hold.

ATIS 118.325	NEW ORLEANS APP CON 119.3 350.35	HAMMOND TOWER ★ 120.575 (CTAF) 0	GND CON 119.85	CLNC DEL 119.3 (When twr closed)
------------------------	--	---	--------------------------	---

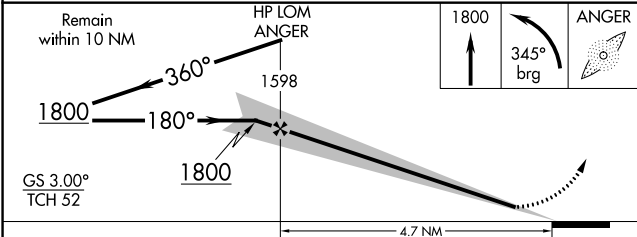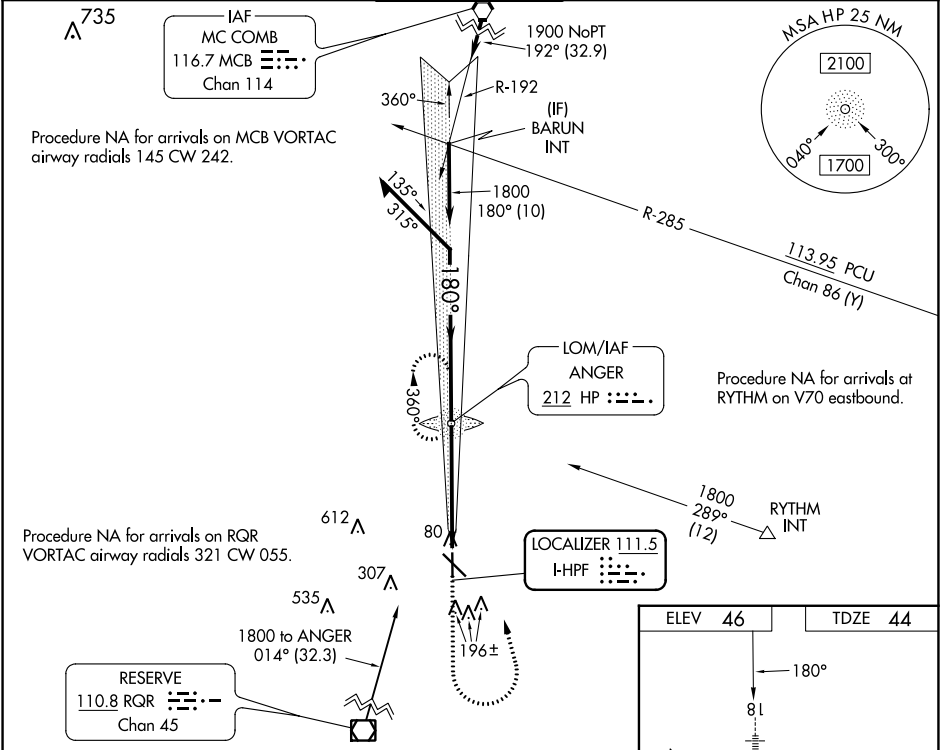

CATEGORY	A	B	C	D
S-ILS 18	250-½ 206 (300-½)			
S-LOC 18	540-½	496 (500-½)	540-1	496 (500-1)
CIRCLING	540-1	494 (500-1)	620-1½ 574 (600-1½)	920-2¾ 874 (900-2¾)

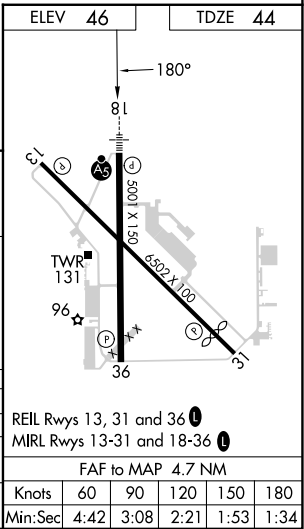

SC-4, 18 APR 2024 to 16 MAY 2024

SC-4, 18 APR 2024 to 16 MAY 2024