

WAAS CH 42607 W36A	APP CRS 004°	Rwy Idg TDZE Apt Elev	5003 36 39
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) RWY 36

FALSE RIVER RGNL (HZR)

RNP APCH


▼

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Baro-VNAV and VDP NA when using Baton Rouge altimeter setting. When local altimeter setting not received, use Baton Rouge altimeter setting and increase all DA 51 feet and all visibility ½ SM; increase all MDA 60 feet, and LNAV Cat C/D visibility ½ SM and Circling Cat C visibility ¼ SM. For inop ALS when using Baton Rouge altimeter setting, increase LNAV/VNAV visibility to 1 SM and LNAV Cat C/D visibility to 1½ SM.

ODALS

MISSED APPROACH: Climb to 2300 direct FENPU and hold.

AWOS-3PT 121.250	BATON ROUGE APP CON★ 120.3 278.3	UNICOM 122.8 (CTAF) 0
----------------------------	--	---------------------------------

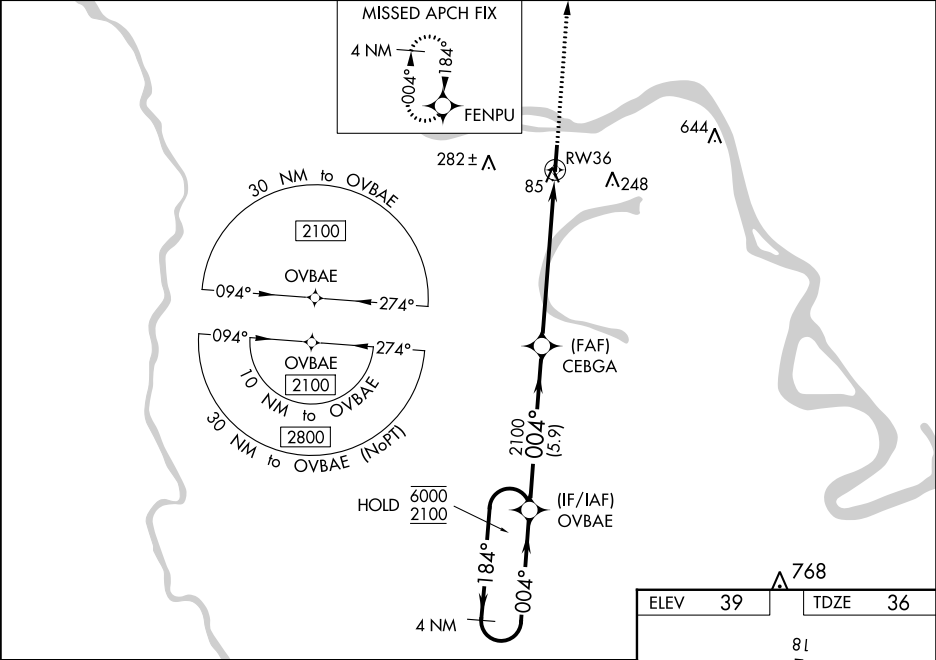

4 NM Holding Pattern		OVB AE	CEB GA	2300 FENPU	*LNAV only.	
6000 ← 184°		004° →	004° →	2100	*1.4 NM to RW36	
GP 3.00°					RW36	
TCH 50						
		5.9 NM	4.9 NM	1.4 NM		
CATEGORY	A	B	C	D		
LPV DA		286-¾	250 (300-¾)			
LNAV/VNAV DA		307-¾	271 (300-¾)			
LNAV MDA	520-¾ 484 (500-¾)	520-1 484 (500-1)	520-1¼ 484 (500-1¼)			
CIRCLING	520-1 481 (600-1)		600-1½ 561 (600-1½)	600-2 561 (600-2)		

