

WAAS

CH **50514**

W20A

APP CRS

200°

Rwy Idg

5500

TDZE

969

Apt Elev

969

RNAV (GPS) RWY 20

CULLMAN RGNL/FOLSOM FLD (CMD)

RNP APCH - GPS.


▼

▲

Circling Rwy 2 NA at night. Baro-VNAV and VDP NA when using Huntsville Intl-Carl T Jones Fld altimeter setting. Rwy 20 helicopter visibility reduction below $\frac{3}{4}$ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local dlimeter setting not received, use Huntsville Intl-Carl T Jones Fld altimeter setting and increase LPV DA to 1320 feet, LNAV/VNAV DA to 1479 feet, and increase all MDA 120 feet; increase LPV all Cats visibility $\frac{1}{4}$ SM, LNAV/VNAV all Cats visibility $\frac{1}{4}$ SM, LNAV Cat C, D visibility $\frac{3}{8}$ SM and Circling Cat C $\frac{1}{2}$ SM, Cat D $\frac{1}{4}$ SM.

MISSED APPROACH:
Climb to 3200 direct
MELYE and hold.

AWOS-3PT 124.175	HUNTSVILLE APP CON★ 118.05 239.0	UNICOM 122.8 (CTAF) 0
----------------------------	--	--

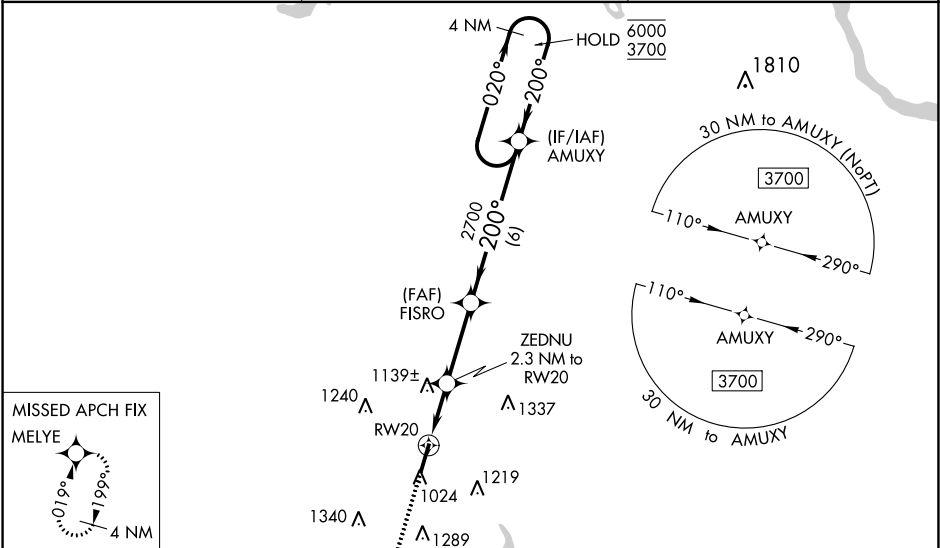

ELEV **969**

TDZE **969**

3200

MELYE

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00°/TCH 33).

4 NM Holding Pattern

*LNAV only.

ZEDNU 2.3 NM to RW20

FISRO 2700

1740*

2700

GP 3.00° TCH 40

1.2 NM

1.1 NM

3 NM

6 NM

CATEGORY	A	B	C	D
LPV DA	1219- $\frac{3}{4}$ 250 (300- $\frac{3}{4}$)			
LNAV/VNAV DA	1378-1 $\frac{1}{8}$ 409 (500-1 $\frac{1}{8}$)			
LNAV MDA	1400-1	431 (500-1)	1400-1 $\frac{1}{4}$	431 (500-1 $\frac{1}{4}$)
CIRCLING	1420-1 451 (500-1)	1500-1 531 (600-1)	1600-1 $\frac{3}{4}$ 631 (700-1 $\frac{3}{4}$)	1640-2 $\frac{1}{4}$ 671 (700-2 $\frac{1}{4}$)