


APCH CRS	Rwy Idg	5000
047°	TDZE	595
	Arprt Elev	595

AL-6373 (USA)

SABRE AAF (FORT CAMPBELL) (KEOD)

RNP APCH-GPS	MISSED APPROACH: Climb to 2400 direct NIXAE and hold.
RADAR required	
 * Circling not authorized to Rwy 05R/23L.	

SABRE ATIS	CAMPBELL APP CON/DEP CON	TOWER *	GND CON	CLNC DEL	EAGLE RADIO	ASR
306.5	134.35 307.025	124.675 (CTAF) 290.45	142.975 267.3	237.6	285.7	

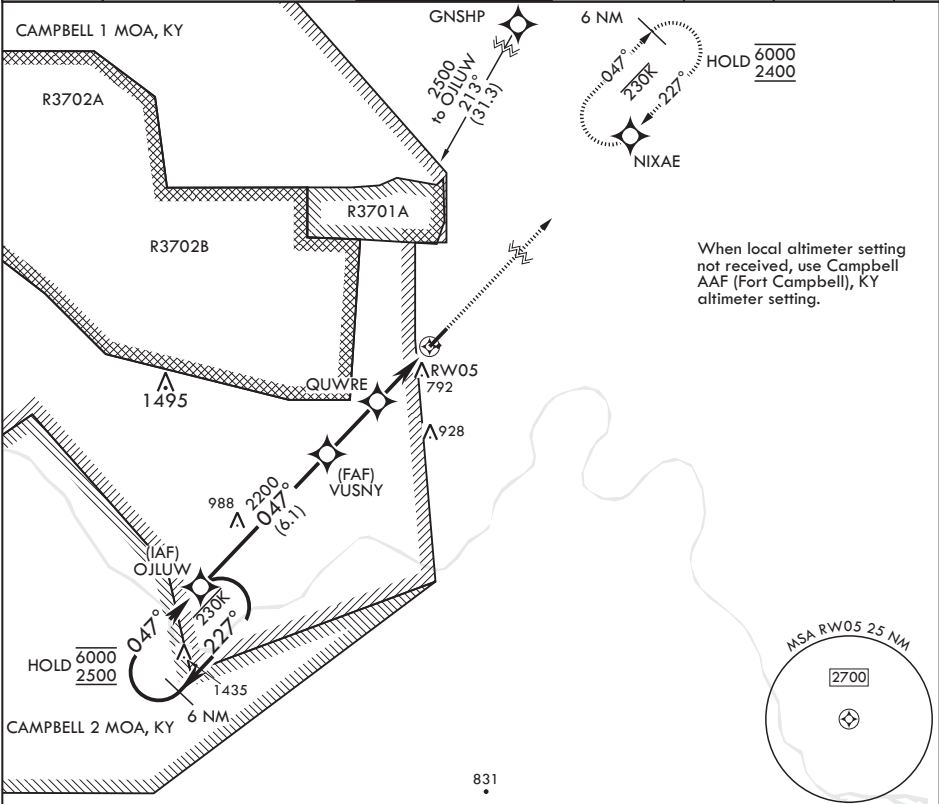

6 NM Holding Pattern OJLUW		† VDP NA when using Campbell AAF (Fort Campbell) altimeter setting.		2400	NIXAE	ELEV 595	TDZE 595
6000 2500 047° 227° 2500		VUSNY					
		QUWRE 2.5 NM to RW05					
		† 1.6 NM to RW05					
		3.01° TCH 45					
		RW05					
		2.4 NM					
		2.5 NM					
CATEGORY	A	B	C	D			
LNAV MDA	1180-1 585 (600-1)	1180-1 585 (600-1)	1180-1 585 (600-1)	1180-1 585 (600-1)			
CIRCLING*	1180-1 585 (600-1)	1240-1 645 (700-1)	1300-2 705 (800-2)	1300-2 705 (800-2)			