



VORTAC CVG	APP CRS	Rwy Idg	2589
117.3	171°	TDZE	584
Chan 120		Apt Elev	584

VOR RWY 19
CINCINNATI WEST (I67)

 **NA** DME or RADAR required. Use Butler Co Rgnl-Hogan Field altimeter setting, when not received, use Cincinnati/Northern Kentucky Intl altimeter setting and increase all MDA 40 feet, and S-19 Cat A visibility ¼ mile. Procedure NA at night. Rwy 1, 19 helicopter visibility reduction below 1 SM NA.

MISSED APPROACH: Climb to 2000, then climbing right turn to 2600 via CVG VORTAC R-351 to NESRY/ CVG 20 DME/RADAR and hold.

AWOS-3PT 118.15	CINCINNATI APP CON 128.7 254.25	UNICOM 123.0 (CTAF) 
--------------------	------------------------------------	--

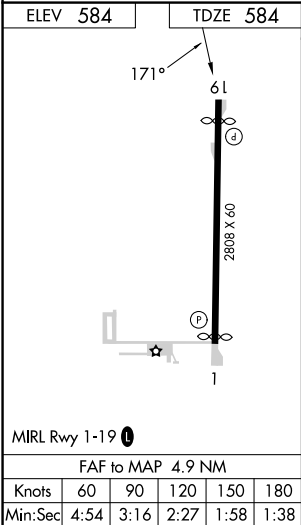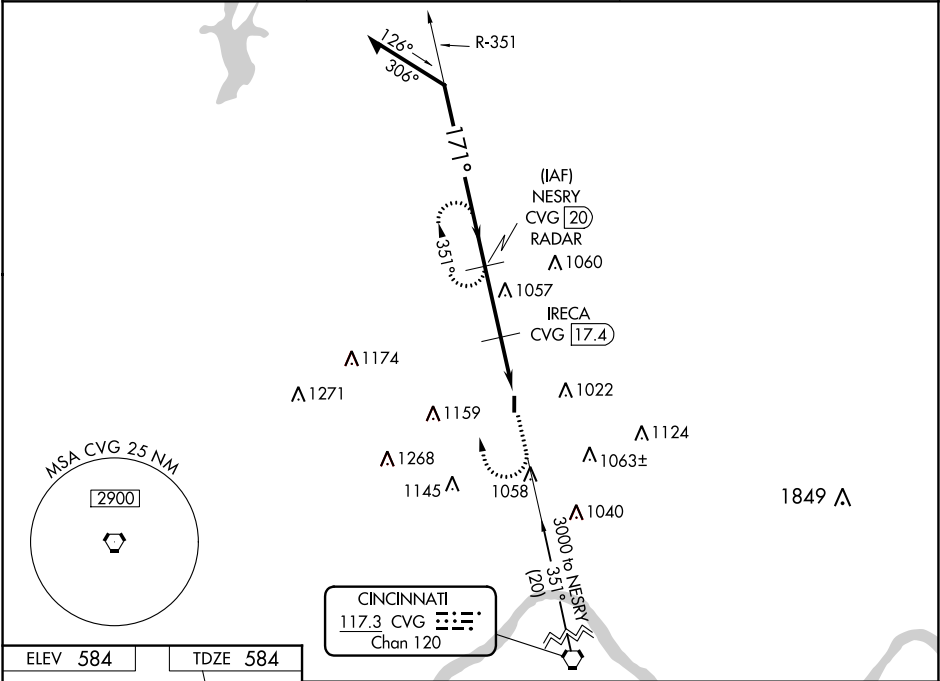

Remain within 10 NM		NESRY CVG 20 RADAR		2000	2600	CVG R-351	NESRY CVG 20 RADAR
2600		351°	171°	3.45° TCH 40	IRECA CVG 17.4	CVG 15.2	
		2400	1440	2.6 NM	2.3 NM		
CATEGORY	A	B	C	D			
S-19	1440-1 856 (900-1)	1440-1¼ 856 (900-1¼)	NA				
CIRCLING	1440-1 856 (900-1)	1440-1¼ 856 (900-1¼)	NA				
IRECA FIX MINIMUMS							
S-19	1340-1 756 (800-1)	1340-1¼ 756 (800-1¼)	NA				
CIRCLING	1340-1 756 (800-1)	1340-1¼ 756 (800-1¼)	NA				