


|                                        |                        |                                                                 |
|----------------------------------------|------------------------|-----------------------------------------------------------------|
| WAAS<br>CH <b>50416</b><br><b>W02A</b> | APP CRS<br><b>020°</b> | Rwy Idg <b>6100</b><br>TDZE <b>3786</b><br>Apt Elev <b>3788</b> |
|----------------------------------------|------------------------|-----------------------------------------------------------------|

RNAV (GPS) RWY 2  
HEREFORD MUNI (HR.X)


⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C (-7°F) or above 41°C (105°F).  
⚠ DME/DME RNP-0.3 NA. When local altimeter setting not received, use Rick Husband Amarillo Intl altimeter setting: Increase LPV DA to 4098 feet and all Cats visibility ¼ SM, increase LNAV/VNAV DA to 4238 feet and all Cats visibility ¼ SM, increase all MDA 120 feet; increase LNAV Cats C/D visibility ¼ SM, increase Circling Cat C visibility ½ SM and Cat D visibility ¼ SM. Baro-VNAV NA when using Rick Husband Amarillo Intl altimeter setting. VDP NA with Rick Husband Amarillo Intl altimeter setting.

MISSED APPROACH:  
Climb to 6000 direct WAHLO and hold.


|                         |                                          |                                 |
|-------------------------|------------------------------------------|---------------------------------|
| AWOS-3<br><b>118.05</b> | AMARILLO APP CON ★<br><b>119.5 307.0</b> | UNICOM<br><b>122.8 (CTAF) 0</b> |
|-------------------------|------------------------------------------|---------------------------------|

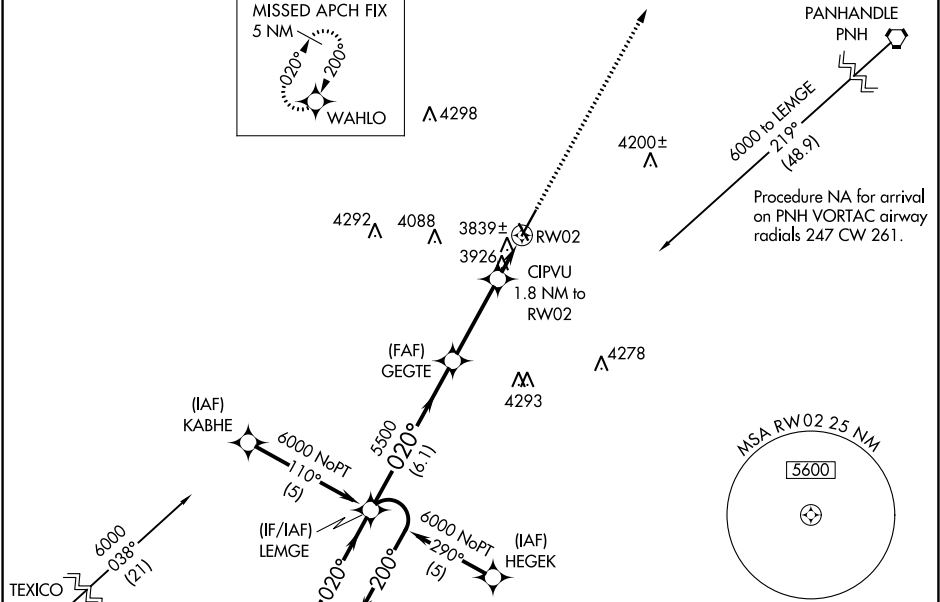

|           |           |
|-----------|-----------|
| ELEV 3788 | TDZE 3786 |
|-----------|-----------|

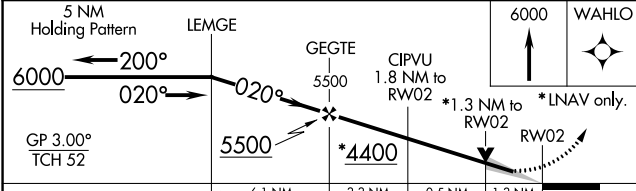

| CATEGORY     | A                          | B           | C                          | D                          |
|--------------|----------------------------|-------------|----------------------------|----------------------------|
| LPV DA       | 3986-3/4 200 (200-3/4)     |             |                            |                            |
| LNAV/VNAV DA | 4126-1 3/4 340 (400-1 1/4) |             |                            |                            |
| LNAV MDA     | 4240-1                     | 454 (500-1) | 4240-1 1/4 454 (500-1 1/4) | 4240-1 1/2 454 (500-1 1/2) |
| CIRCLING     | 4280-1                     | 492 (500-1) | 4440-1 3/4 652 (700-1 3/4) | 4620-2 3/4 832 (900-2 3/4) |

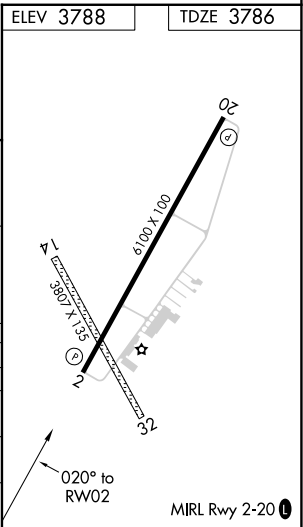

SC-2, 18 APR 2024 to 16 MAY 2024

SC-2, 18 APR 2024 to 16 MAY 2024