

RNP APCH - GPS.


▼

NA

Procedure NA at night. Use Monett altimeter setting, when not received, use Rogers altimeter setting and increase all MDA 20 feet. Increase LP Cat C visibility ½ SM.

MISSED APPROACH: Climb to 3300 direct ZURES and hold.

HFJ AWOS-3 118.275	SPRINGFIELD APP CON 124.95 318.2	CTAF 122.9
------------------------------	--	----------------------

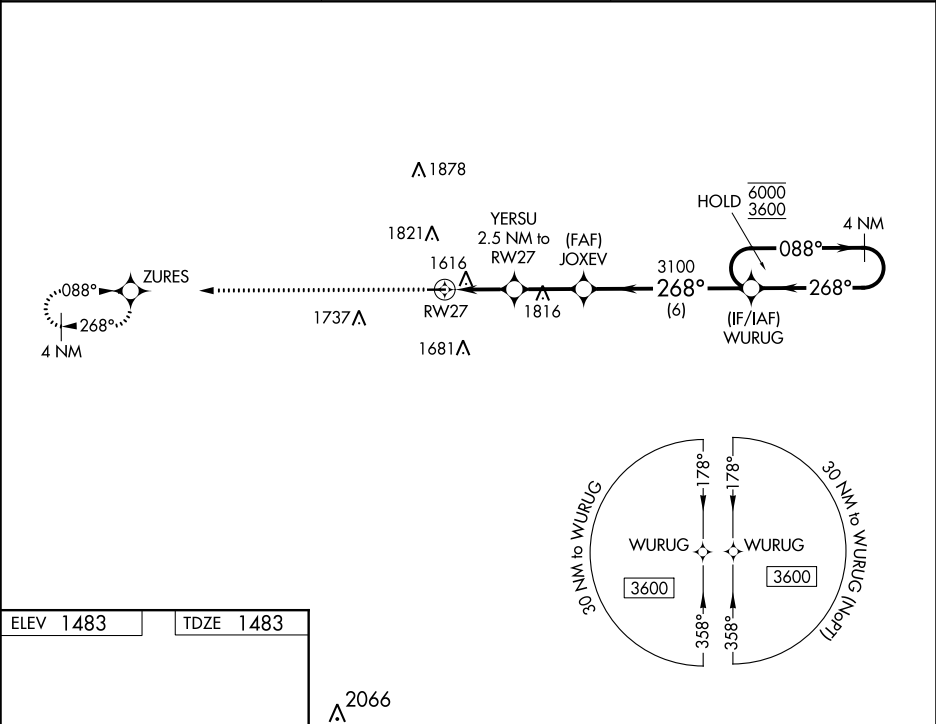

ELEV **1483**

TDZE **1483**

3300

ZURES

3599 X 60

27

268° to RW27

2066

3300

ZURES

YERSU

2.5 NM to RW27

JOXEY

2.5 NM to RW27

WURUG

4 NM Holding Pattern

3100

268°

088°

6000

3600

CATEGORY	A	B	C	D
LP MDA	1920-1	437 (500-1)	1920-1¼ 437 (500-1¼)	NA
LNAV MDA	1940-1	457 (500-1)	1940-1⅝ 457 (500-1⅝)	NA
CIRCLING	2000-1 517 (600-1)	2180-1 697 (700-1)	2180-2 697 (700-2)	NA

CASSVILLE, MISSOURI

CASSVILLE MUNI (94K)

Orig-B 11AUG22

36°42'N-93°54'W

RNAV (GPS) RWY 27