

MILFORD, IOWA

AL-6455 (FAA)

23278

VOR/DME SPW 115.15 Chan 98 (Y)	APP CRS 005°	Rwy Idg TDZE Apt Elev N/A N/A 1439
--	------------------------	--


VOR-A
FULLER(4D8)


DME required. RADAR required for procedure entry.

NA Circling NA to Rwy 18 and 36. Procedure NA at night.
Use Spencer altimeter setting, when not received, use
Estherville altimeter setting and increase all MDA 40 feet.

MISSED APPROACH: Climbing right turn to 3000 direct
SPW VOR/DME and hold.

SPW ASOS 126.625	MINNEAPOLIS CENTER 127.75 257.7	CTAF 122.9
----------------------------	---	----------------------

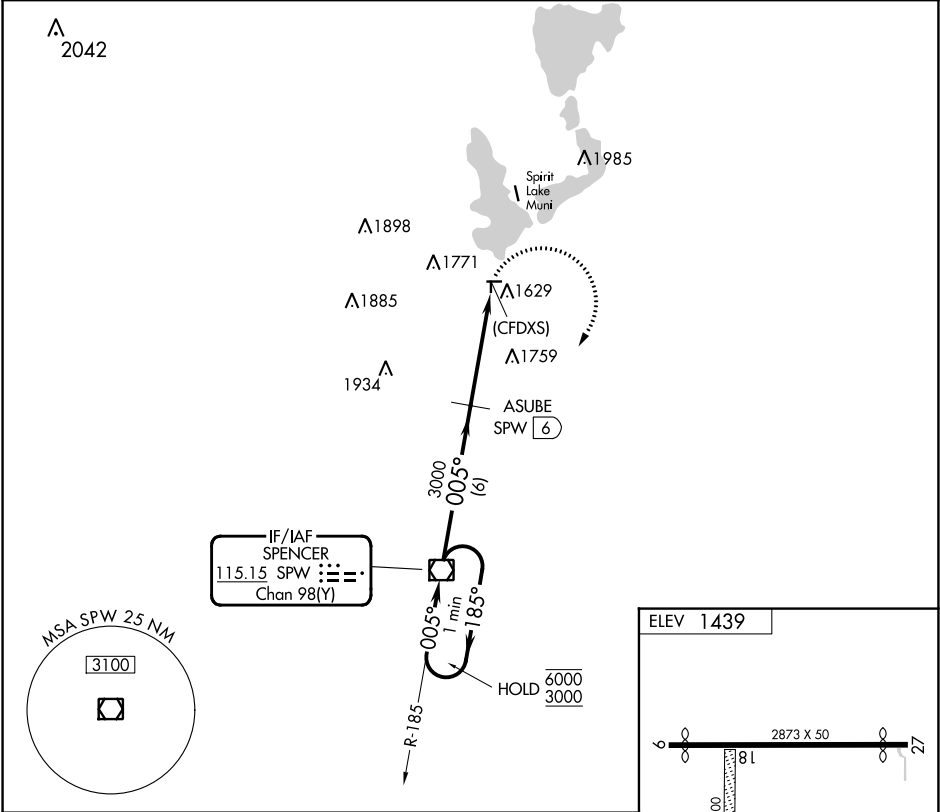

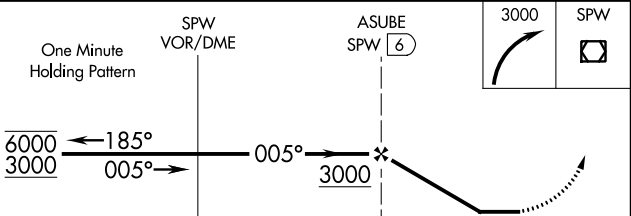One Minute Holding Pattern 		3000 		SPW 	
		0.3% UP 2200 X 1 36 005° URL Rwy 9-27 and 18-36			
CATEGORY		A	B	C	D
CIRCLING		2100-1 661 (700-1)		NA	
FAF to MAP 4.4 NM					
Knots		60	90	120	150 180
Min:Sec		4:24	2:56	2:12	1:46 1:28

MILFORD, IOWA

43°20'N-95°10'W

Amtd 1 03JAN19

FULLER(4D8)

VOR-A

NC-3, 18 APR 2024 to 16 MAY 2024

NC-3, 18 APR 2024 to 16 MAY 2024