

WAAS
CH **65903**
W01A

APP CRS
007°

Rwy Idg **4206**
TDZE **794**
Apt Elev **798**

RNAV (GPS) RWY 1
SKYHAVEN (RCM)

RNP APCH - GPS.

▼

▲



Circling Rwy 32 NA at night. Baro-VNAV NA when using Whiteman AFB altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Rwy 1 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Knob Noster altimeter setting and increase LPV DA to 1083 feet and all visibilities ½ SM. Increase LNAV/VNAV DA to 1194 feet and all visibilities ½ SM. Increase all MDAs 40 feet and LNAV visibility Cat C ½ SM, and Circling visibility Cat C ½ SM.

MISSED APPROACH:
Climb to 3000 direct
FALIS and hold.

AWOS-3PT
119.575

WHITEMAN APP CON ★
127.45 284.0

UNICOM
123.0 (CTAF) 0

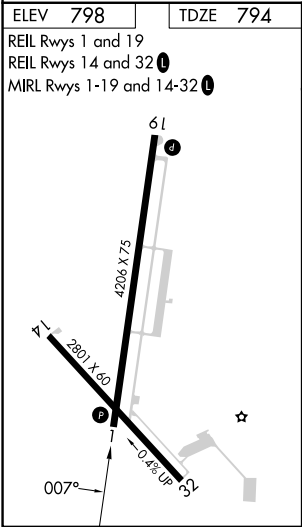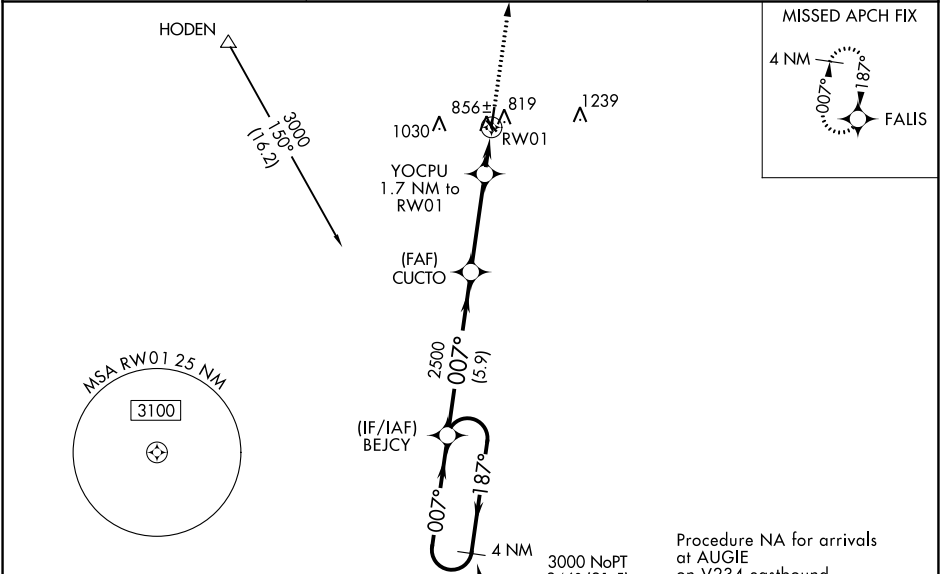

4 NM Holding Pattern				BEJCY	CUCTO	YOCPU 1.7 NM to RWY1	3000	FALIS
GP 3.00° TCH 36				187°	007°	007°	2500	*LNAV only.
				5.9 NM	3.6 NM	1.7	1360	
CATEGORY	A	B	C	D				
LPV DA	1044-1	250 (300-1)		NA				
LNAV/ VNAV DA	1155-1¼	361 (400-1¼)		NA				
LNAV MDA	1220-1	426 (500-1)	1220-1¼ 426 (500-1¼)	NA				
CIRCLING	1260-1 462 (500-1)	1340-1 542 (600-1)	1380-1½ 582 (600-1½)	NA				