



WAAS CH 82515 W31A	APP CRS 314°	Rwy Idg TDZE 837 Apt Elev 841	4012
--	------------------------	---	-------------

RNAV (GPS) RWY 31

OSKALOOSA MUNI (00A)

RNP APCH.	MISSED APPROACH: Climb to 3000 direct NELLY and hold.
When local altimeter setting not received, use Ottumwa altimeter setting and increase all DA 18 feet and all MDA 20 feet and increase LNAV/VNAV all Cats visibility ¼ mile. Baro-VNAV and VDP NA when using Ottumwa altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.6°C (4°F) or above 54°C (130°F).	

AWOS-3 118.625	CHICAGO CENTER 118.15 335.575	UNICOM 122.8 (CTAF) 0
--------------------------	---	---------------------------------

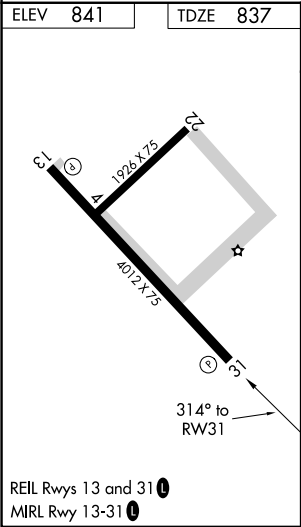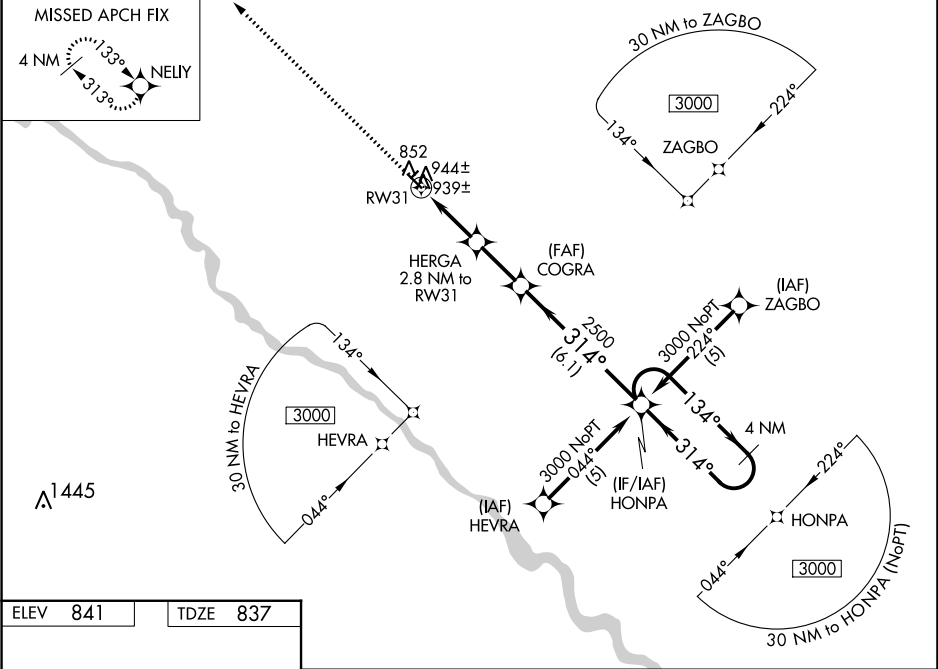

3000	NELLY	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 22).	HONPA	4 NM Holding Pattern
*LNAV Only	HERGA 2.8 NM to RW31	COGRA	134°	3000
1.1 NM to RW31	1760	2500	314°	GP 3.00° TCH 40
1.1	1.7	2.2 NM	6.1 NM	
CATEGORY	A	B	C	D
LPV DA	1187-1¼	350 (400-1¼)		NA
LNAV/VNAV DA	1209-1¼	372 (400-1¼)		NA
LNAV MDA	1200-1	363 (400-1)		NA
CIRCLING	1260-1 419 (500-1)	1300-1 459 (500-1)	1300-1½ 459 (500-1½)	NA