

WAAS CH 70504 W36A	APP CRS 356°	Rwy Idg 5201 TDZE 1277 Apt Elev 1277
--	------------------------	---

RNAV (GPS) RWY 36

WELLINGTON MUNI (E/GT)


RNP APCH.

NA

Baro-VNAV and VDP NA when using Wichita Dwight D Eisenhower Ntl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use Wichita Dwight D Eisenhower Ntl altimeter setting: increase LPV DA to 1581 feet; increase LNAV/VNAV DA to 1668 feet and all visibilities ½ SM; increase all MDA 60 feet and Circling Cat C/D visibility ¼ SM.

MISSED APPROACH:
Climb to 3000 direct TANUC and hold.

AWOS-3P 118.875	WICHITA APP CON 134.85	UNICOM 122.8 (CTAF) 0
---------------------------	----------------------------------	---------------------------------

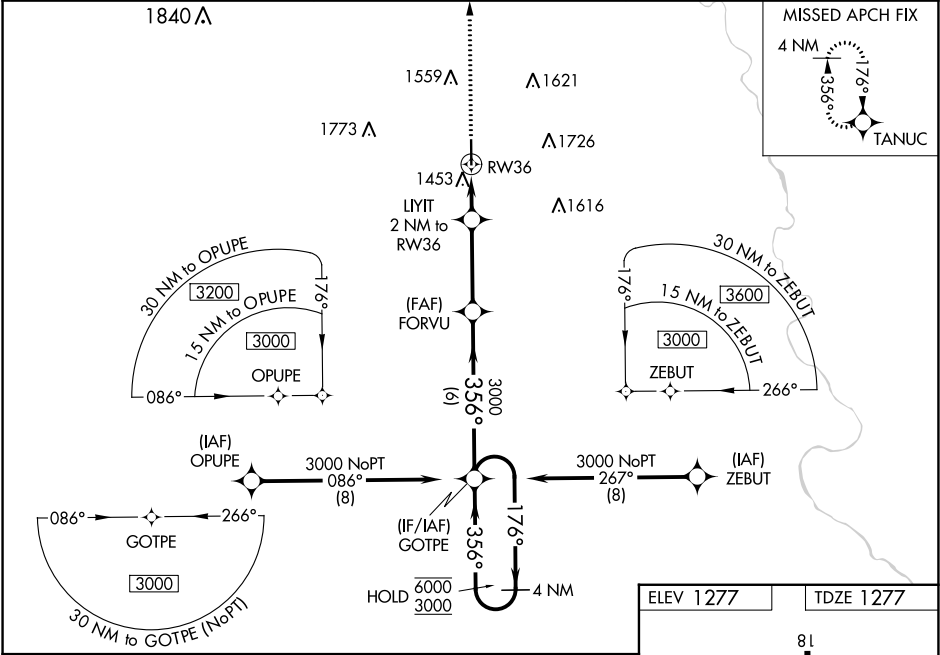

3000	TANUC	LIMT 2 NM to RW36	FORVU 3000	GOTPE	4 NM Holding Pattern
*LNAV only.		*1.3 NM to RW36	356°	176°	6000
			3000	356°	3000
			1940*		GP 3.00° TCH 40
			1.3 NM	0.7	3.3 NM
					6 NM
CATEGORY	A	B	C	D	
LPV DA		1527-1	250 (300-1)		
LNAV/VNAV DA		1614-1	337 (400-1)		
LNAV MDA	1720-1	443 (500-1)	1720-1¾	443 (500-1¾)	
CIRCLING	1760-1	483 (500-1)	2040-2¼	2140-2¾	
			763 (800-2¼)	863 (900-2¾)	

